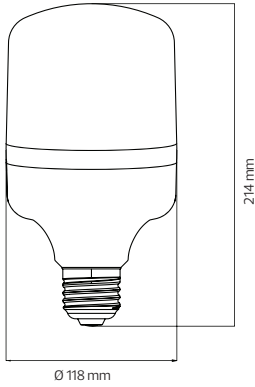
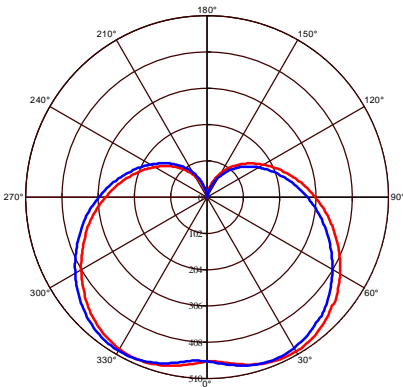


# LED BULB

Product&amp;Family Code:

**001**
**016**
**0040**
**TORCH-40**

**Technical Drawing**

**Photometric Diagram**


C0 Plane beam angle(50%):200.2(DEG) C90 Plane beam angle(50%):199.8(DEG)

## Technical Data

Voltage (V)	175-250V
Product Wattage (W)	40
Equivalence with incandescent lamp	320
Colour Render Index (Ra)	>Ra75
Colour Temperature (K)	3000K-4200K-6400K
Materials	Aluminium + PC
Protection Class	-
Dimmable	No
EEI	<b>A<sup>+</sup></b>
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	3150
Luminous Efficacy (lm/W)	80
Rated Life (hrs) ⌚	25,000
IP Rating	-
Power Factor	>0.5
Beam Angle ☆	200 °
Starting Time	>0.2s
Number of ON-OFF cycling	x20,000

## Applications

- Applicable to the shops along the street, shops, shopping malls supermarkets and other indoor lighting places.



## Features

- Low power consumption
- Efficient replacement for incandescent lamps
- Mercury free, no UV and IR radiation
- Instant on, 100% light output

