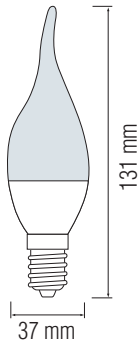
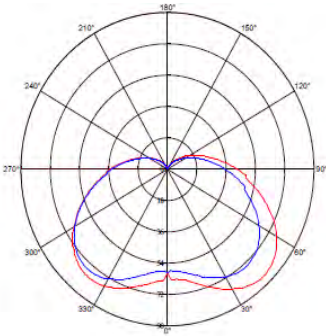


LED BULB


 Product&Family Code: **001 004 0004**
CRAFT-4

Technical Drawing

Photometric Diagram


Technical Data	
Voltage (V)	175-250V
Product Wattage (W)	4
Equivalence with incandescent lamp	32
Colour Render Index (Ra)	>Ra80
Colour Temperature (K)	3000K-4200K-6400K
Materials	Aluminium Housing with PMMA Diffuser
Protection Class	-
Dimmable	No
EEL	A+
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	250
Luminous Efficacy (lm/W)	62.5
Rated Life (hrs) Ⓢ	25,000
IP Rating	-
Power Factor	>0.4
Beam Angle ☆	200 °
Starting Time	<0.5
Number of ON-OFF cycling	x12,500



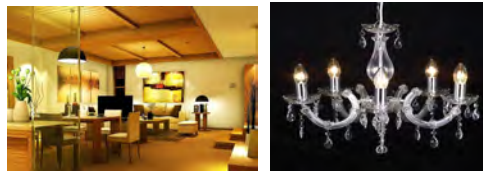



Applications



- The luminaire is an excellent solutions for market, museum, restaurant, show room, and other spot lighting needed.



Features

- Low power consumption
- Efficient replacement for incandescent lamps
- Mercury free, no UV and IR radiation
- Instant on, 100% light output

	12.500X ON / OFF	NO UV / IR	mA 85
	Start Up Time <0.5	%85 ENERGY Saving	25000h Lifetime
	0,0mg	Optimally	Ra >80
	200°	-10°C 40°C	Warm Up %60 < 0.5 sc.
	PF >0.4	Power Factor	

LED 25000 Hours	GLS 1000 Hours
	
4W	32W

										
---	---	---	---	---	---	---	---	---	---	---