


LED DOWNLIGHT

Product&Family Code: 016 037 0003


RITA


 White

Technical Drawing



Photometric Diagram

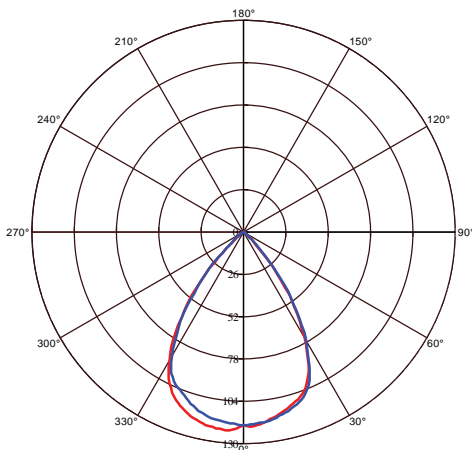

b C0 Plane beam angle(50%) b C90 Plane beam angle(50%)

C0 Plane beam angle(50%):68.7(DEG) C90 Plane beam angle(50%):69.5(DEG)

Technical Data

Voltage (V)	85-265V
Product Wattage (W)	3
Equivalence with incandescent lamp	24
Colour Render Index (Ra)	>Ra70
Colour Temperature (K)	4200K
Materials	Aluminium + Acrylic
Protection Class	II
Dimmable	No
EEL	A to A++
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	210
Luminous Efficacy (lm/W)	70
Rated Life (hrs) ⌚	30.000
IP Rating	20
Power Factor	>0.5
Beam Angle	64°
Starting Time	<0.2s
Number of ON-OFF cycling	x20.000

Applications

- Indoor Applications; Bathroom, Car Park, Cinema, Gallery, Hospital, Hotel, Kitchen, etc.



Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- COB LED Lamp Base.

