



# LED DOWNLIGHT

Product&amp;Family Code:


016 031 0003

**LISA**


## Technical Drawing

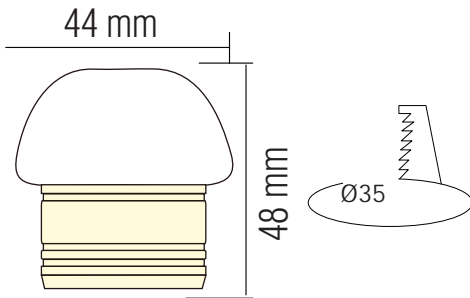

## Photometric Diagram

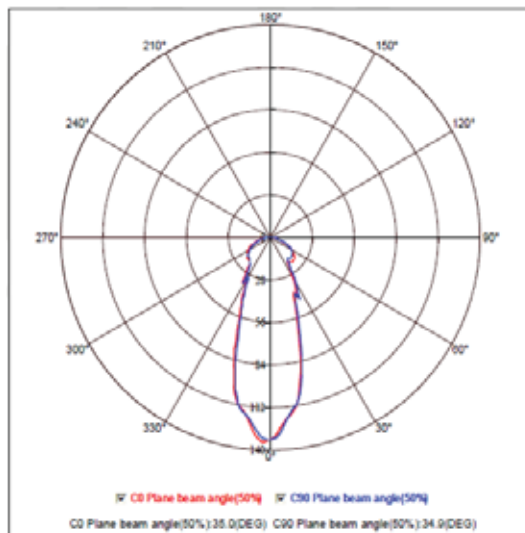

## Technical Data

Voltage (V)	220-240V
Product Wattage (W)	3
Equivalence with incandescent lamp	24
Colour Render Index (Ra)	>Ra70
Colour Temperature (K)	4200K
Materials	Aluminium and Acrylic
Protection Class	II
Dimmable	No
EEI	A to A++
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	125
Luminous Efficacy (lm/W)	41
Rated Life (hrs) ⌚	30.000
IP Rating	22
Power Factor	>0.5
Beam Angle	35°
Starting Time	<0.2s
Number of ON-OFF cycling	x15.000

## Applications

- Bathroom, Outdoor Areas, Car Park, Cinema, Gallery, Hospital, Hotel, Kitchen, etc.



## Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- COB LED Lamp Base.

