

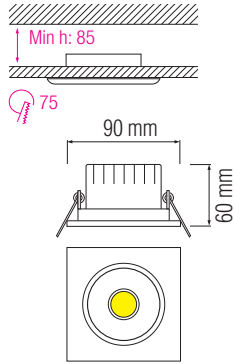
# LED DOWNLIGHT

 Product&Family Code: **016 008 0003**
**MELISA-3**

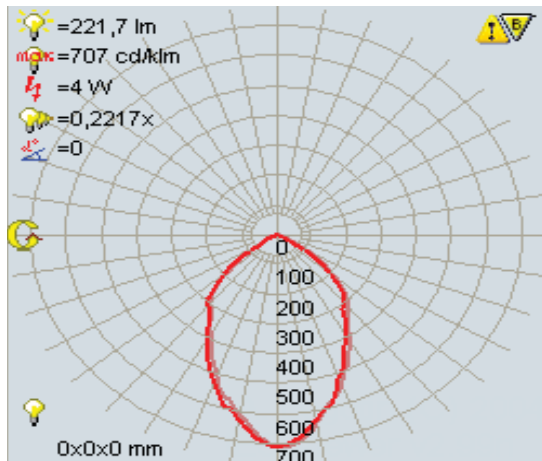

## Technical Data

Voltage (V)	220-240V
Product Wattage (W)	3
Equivalence with incandescent lamp	24
Colour Render Index (Ra)	>Ra70
Colour Temperature (K)	2700K / 4200K / 6500K
Materials	Aluminium Die Casting Body
Protection Class	II
Dimmable	No
EEI	<b>A</b> to <b>A++</b>
Warm-up time up to 60 % of the full light output	Instant Full Light
Luminous Flux (lm)	208 - 230
Luminous Efficacy (lm/W)	69 - 76
Rated Life (hrs) Ⓢ	40.000
IP Rating	20
Power Factor	>0.5
Beam Angle	87°
Starting Time	<0.2s
Number of ON-OFF cycling	x25.000

## Technical Drawing



## Photometric Diagram



## Applications

Airport, Bathroom, Bedroom, Car Park, Cinema, Gallery, Hospital, Hotel, Kitchen, Museum etc.



## Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- Innovative design of assembly structure.
- Extremely Long Life.

