

LED DOWNLIGHT

Product&Family Code:


016 004 0003

MIRANDA


Chrome

Mat Chrome

Technical Drawing

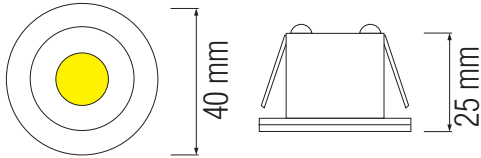
 33


Technical Data	
Voltage (V)	220-240V
Product Wattage (W)	3
Equivalence with incandescent lamp	24
Colour Render Index (Ra)	>Ra70
Colour Temperature (K)	4200K
Materials	Aluminium Die Casting Body
Protection Class	II
Dimmable	No
EEI	A to A++
Warm-up time up to 60 % of the full light output	Instant Full Light
Luminous Flux (lm)	260
Luminous Efficacy (lm/W)	86
Rated Life (hrs) ⌚	30.000
IP Rating	20
Power Factor	>0.5
Beam Angle	30°
Starting Time	<0.2s
Number of ON-OFF cycling	x10.000

Applications

Indoor applications; Bathroom, Bedroom, Cinema, Gallery, Hospital, Hotel, Kitchen, Museum etc.



Photometric Diagram

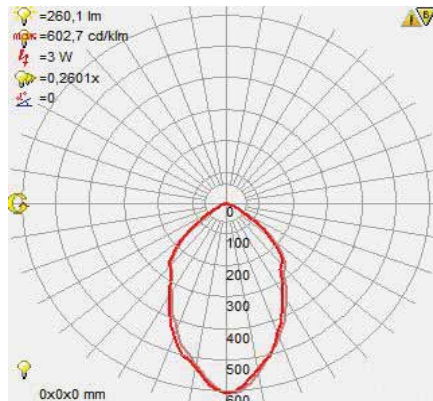

Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- Innovative design of assembly structure.
- Extremely Long Life.

