


LED HIGH BAY LAMP


 Product&Family Code: **063 001 0050**
ATLAS-50


| Technical Data | |
|---|--------------------|
| Voltage (V) | 220-240V |
| Product Wattage (W) | 50 |
| Equivalence with incandescent lamp(W) | 400 |
| Colour Render Index (Ra) | >Ra80 |
| Colour Temperature (K) | 6400K |
| Materials | Aluminium Body |
| Protection Class | I |
| Dimmable | No |
| EEL | A to A++ |
| Warm-up time up to 60 %of the full light output | Instant Full Light |
| Luminous Flux (lm) | 2574 |
| Luminous Efficacy (lm/W) | 52 |
| Rated Life (hrs) ⌚ | 30.000 |
| IP Rating | 20 |
| Power Factor | >0.9 |
| Beam Angle | 90° |
| Starting Time | <0.2s |
| Number of ON-OFF cycling | x35.000 |

Technical Drawing

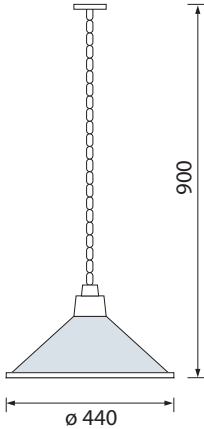

Photometric Diagram

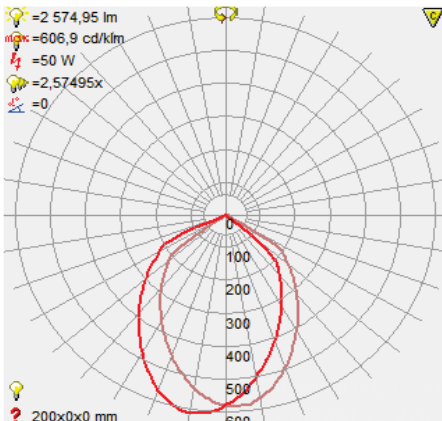

Applications

- Warehouse, indoor lighting areas.



Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.
- Very low energy consumption.

