




LED PANEL

 Product&Family Code: **056 001 0050**
STAR-50


Technical Drawing



Photometric Diagram

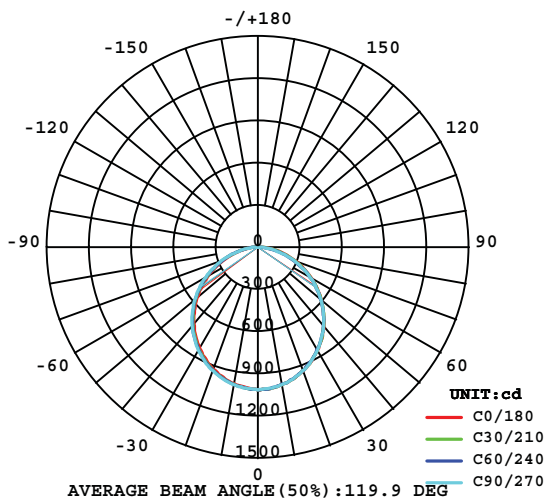

Technical Data

Voltage (V)	220-240V
Product Wattage (W)	50
Equivalence with incandescent lamp	400
Colour Render Index (Ra)	>Ra80
Colour Temperature (K)	4200K / 6400K
Materials	Aluminium+PC
Protection Class	I
Dimmable	No
EEI	A to A++
Warm-up time up to 60 % of the full light output	Instant Full Light
Luminous Flux (lm)	4200
Luminous Efficacy (lm/W)	84
Rated Life (hrs) ⌚	40.000
IP Rating	20
Power Factor	>0.9
Beam Angle	120°
Starting Time	<0.2s
Number of ON-OFF cycling	x15.000

Applications

- Indoor applications; Business Center, Airport, Car Park, Cinema, Gallery, Hospital, Hotel, Museum etc.



Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.
- Aluminum Die Casting Body

