

WATERPROOF LAMP WITH LED TUBE


Product Code: 059 002 1009

SU-1009




INCLUDED LED TUBE
PC COVER

Technical Drawing

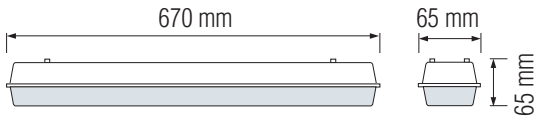

Photometric Diagram

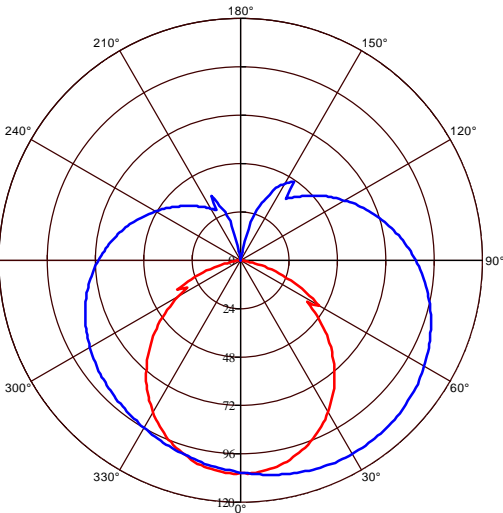

↳ C0 Plane beam angle(50%) ↳ C90 Plane beam angle(50%)

C0 Plane beam angle(50%):101.4(DEG) C90 Plane beam angle(50%):234.4(DEG)

Technical Data

Voltage (V)	175-250V
Product Wattage (W)	9
Equivalence with incandescent lamp(W)	72
Colour Render Index (Ra)	>Ra70
Colour Temperature (K)	6400K
Materials	PC Cover
Protection Class	II
Dimmable	No
EEI	A to A++
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	750
Luminous Efficacy (lm/W)	83
Rated Life (hrs) ⌚	25.000
IP Rating	54
Power Factor	>0.9
Beam Angle	200°
Starting Time	< 0.5s
Number of ON-OFF cycling	x15.000

Applications

- Under shop awnings, car parks, school perimeters, warehouse.



Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.
- Very low energy consumption.

