

# PRODUCT DATASHEET

## SST CLAS P 40 FR 5.5 W/2700K E14

LED RELAX and ACTIVE CLASSIC P | LED lamps with two light colors in one lamp



---

### AREAS OF APPLICATION

- Wherever dimming was originally not planned
- Residential interiors
- Hospitality
- Outdoor use in outdoor luminaires only (minimum IP65)

---

### PRODUCT BENEFITS

- Easy dimming with double click of wall switch
- Easy and cost-effective operation, no dimmer required
- Low energy consumption
- Easy relamping thanks to compact design
- Instant 100 % light, no warm-up time
- Makes rooms multi-purpose with adjustable light atmosphere

---

### PRODUCT FEATURES

- Provides modes for 100 % and 30 % light output
- Controllable via standard wall switch
- Good quality of light; color rendering index  $R_a \geq 80$
- Mercury-free lamps



**TECHNICAL DATA**


Electrical data

<b>Rated wattage</b>	5.50 W
<b>Nominal wattage</b>	5.50 W
<b>Nominal voltage</b>	220...240 V
<b>Operating frequency</b>	50...60 Hz

Photometrical data

<b>Rated color temperature</b>	2700 K
<b>Lumen main.fact.at end of nom.life time</b>	0.70
<b>Light color (designation)</b>	Cool White/Warm White
<b>Color temperature</b>	2700 K
<b>Luminous flux</b>	470 lm
<b>Color rendering index Ra</b>	≥80
<b>Nominal luminous flux</b>	470 lm

Dimensions & weight



<b>Overall length</b>	86.0 mm
-----------------------	---------

Lifespan

<b>Nominal lamp life time</b>	25000 h
<b>Rated lamp life time</b>	25000 h
<b>Number of switching cycles</b>	100000

Additional product data

<b>Base (standard designation)</b>	E14
<b>Mercury-free</b>	Yes

<b>Product remark</b>	All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value
-----------------------	--

Capabilities

<b>Dimmable</b>	No
-----------------	----


Certificates & standards

<b>Energy efficiency class</b>	A+
--------------------------------	----

Country-specific categorizations

<b>ILCOS</b>	DRBP/F-5/827/840-220-240-E14-45
<b>Order reference</b>	LEDSCLP40ACT/RE

Light Distribution

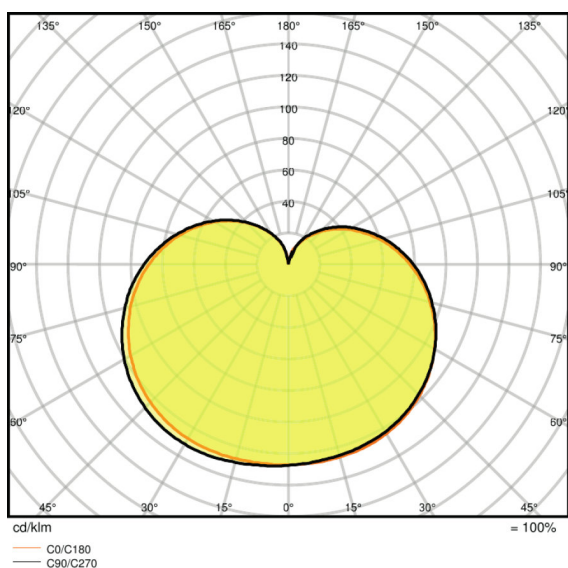

LDC typ polar

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075813618	Blister 1	45 mm x 140 mm x 120 mm	69.96 g	0.76 dm <sup>3</sup>
4058075813625	Shipping carton box 6	285 mm x 153 mm x 136 mm	550.00 g	5.93 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.