


**DATASHEET: 19" WALLMOUNTING ENCLOSURE DW MONOBLOC, DEPTH 395 mm**



DW096040



DW096040

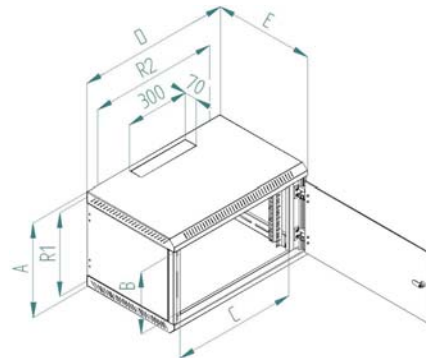

**APPLICATION**

19"-Networking enclosure for wallmounting. Mostly used in offices and similar environments like private flats or houses. Central enclosure in small or medium sized network installations. Can also be used as sub-enclosure in structured cabling systems.

**TECHNICAL DATA**

- Steel sheet
- Available heights: 4, 6, 9, 12, 15 and 18 U
- Width: 600 mm, Depth: 395 mm
- Color: lightgrey RAL7035
- Maximum load: 30 kg
- Degree of protection: IP 30
- Front-full-glasdoor made from safety hardened glass 5 mm including lock and 2 keys
  - Door hinged right, easy and quick change to left hinging possible
  - Door opening: ca. 180°
  - Fullmetall- and perforated doors available as an option
- 19" rails (2 pcs.) galvanised, continuously depthadjustable
- Cable-entry-openings in roof (1x), floor (1x) and rearpanel (2x). Covered with „break-out style“ blanking covers, which can be easily broken out by use of a simple tool like a screwdriver.
- Cable-entry-panel with brush included (1x)
- Passive cooling by ventilation slots
- M8-Earthing point in the rear of the cabinet
- FastOn-Earthing connections to all dismountable parts pre-installed
- Including assembly materials:
  - 8x cage nuts, bolts and washers M6
  - 4x dowel 10x50 and 4x screws M6x50 for fixing to the wall
- Wide range of available accessories (cable entry panels, fixed shelves, patch panels, cable management, PDUs, doors)
- Enclosure is delivered fully-assembled
- Units of measurement:
  - Unit (Height Unit): 1U = 44,45 mm
  - Inch: 1" = 25,4 mm
  - Unit (Height Unit): 1U = 1,75"

	A/mm	B/mm	C/mm	D/mm	E/mm	R1/mm SPACINGS OF MOUNTING HOLES VERTICAL	R2/mm SPACINGS OF MOUNTING HOLES HORIZONTAL
DW046040	280	175	490	600	395	234	420
DW066040	370	265	490	600	395	324	420
DW096040	500	395	490	600	395	454	420
DW126040	635	530	490	600	395	589	420
DW156040	770	665	490	600	395	724	420
DW186040	900	795	490	600	395	854	420

DESCRIPTION	DIM (WxHxD) mm	NET-WEIGHT (kg)	ORDER NUMBER
4 U Wallmounting Enclosure RAL 7035	600x280x395	12,4	DW046040
6 U Wallmounting Enclosure RAL 7035	600x370x395	14,5	DW066040
9 U Wallmounting Enclosure RAL 7035	600x500x395	17,4	DW096040
12 U Wallmounting Enclosure RAL 7035	600x635x395	20,5	DW126040
15 U Wallmounting Enclosure RAL 7035	600x770x395	23,6	DW156040
18 U Wallmounting Enclosure RAL 7035	600x900x395	26,6	DW186040