


DATA SHEET: TOOLLESS LINE RJ45 JACK SHIELDED CAT.6_A (ISO/IEC)

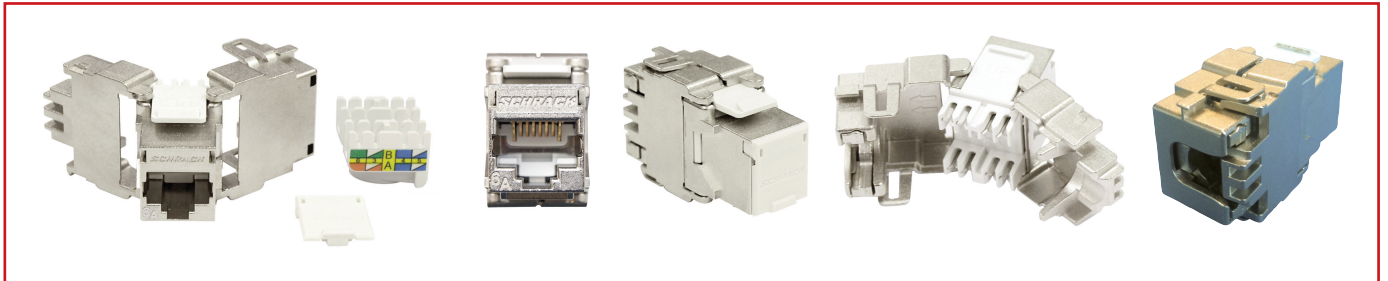

JACK



Shielded TOOLLESS LINE RJ45 keystone module for transmission of analog and digital voice, image and data signals. Performance specifications correspond to Category 6_A according to ISO/IEC 11801 AMD 2 (2010-04). Thus the module fulfills the stronger limits compared to Cat.6A EIA/TIA. ISO/IEC Standard has stronger NEXT@500MHz limits by 3,0 dB compared to EIA/TIA limits. The module is made from 2 parts only and can be installed without the need of any special tool (TOOLLESS). This results in a very convenient and also very quick installation. The module is now contacted to the shield of the cable by a spring-type contact, which is integrated into the EMC-compliant body and cannot be lost. Enhanced electro magnetic compliance (EMC) performance is achieved by the 360° shielding and optimized overlapping of the bodyparts. The module can be re-opened and re-installed. Included in the package is a dust-cover, that can be clipped on, if necessary. It protects the contact-pins against dust and contamination. Please take care that our TOOLLESS LINE data-outlets are already equipped with dust-covers. Thus we recommend the use of these dust-covers only for modules that are used in TOOLLESS LINE patchpanels.

TECHNICAL DATA

- Electrical characteristics: Category 6_A (ISO/IEC) 500 MHz 10 Gb/s
- Standards: ISO/IEC 11801 Amendment 2 (2010-04)
IEC 60603-7-51 Ed.1 (IEC 48B /1977/CDV, (2008.12)
IEEE 802.3an TM-2006
EN 55022 EMC
IEC 60512-4-1DC voltage proof
- Contact cycles (Jack/Patchcord): >750
- Re-Connecting (Jack / Installation cable with same wire gauge): >20
- Configuration: 1-2, 3-6, 4-5, 7-8
- Gold-plating of contacts: 50 µ-inch
- GHMT certified
- Module made from 2 parts only
- Housing: Zinc-alloy, 100% shielded
- 360° Shielding, spring-type
- Wire contacting via IDC self-stripping terminals with color-coded (EIA/TIA 568A and B) wire recess
- Toolless installation (no special LSA tool required)
- Earthing contact (Fast-On) at back of housing
- Module can be re-opened and re-installed
- Installation cables to be used: wire-diameter from AWG 24 – AWG 22
- Dust-cover (white) included in package. Other colors (Red, Blue, Yellow, Black) optionally available: HSEMRJZSKx.
- Module to be used in TOOLLESS LINE patchpanels and outlets



■ DIMENSIONS

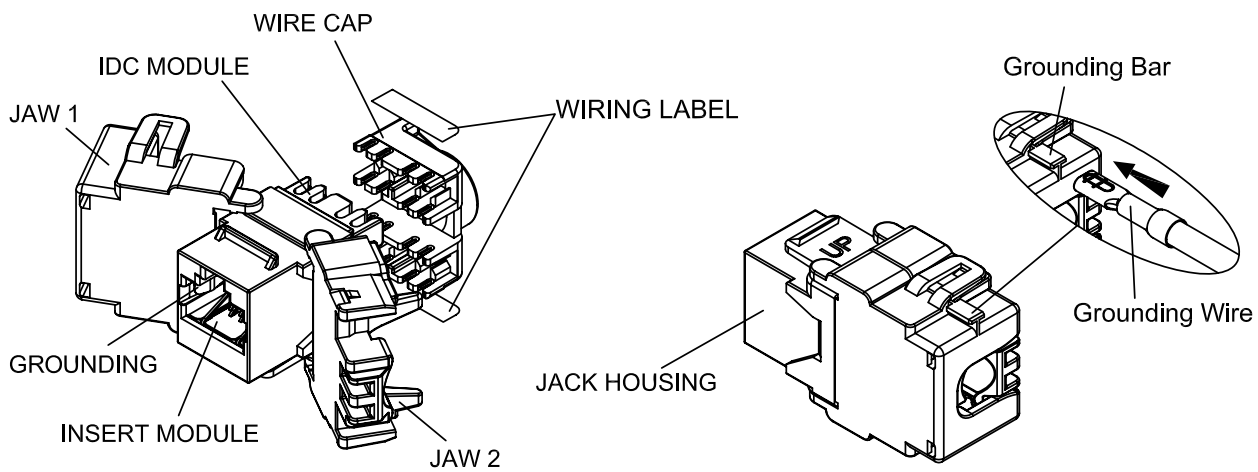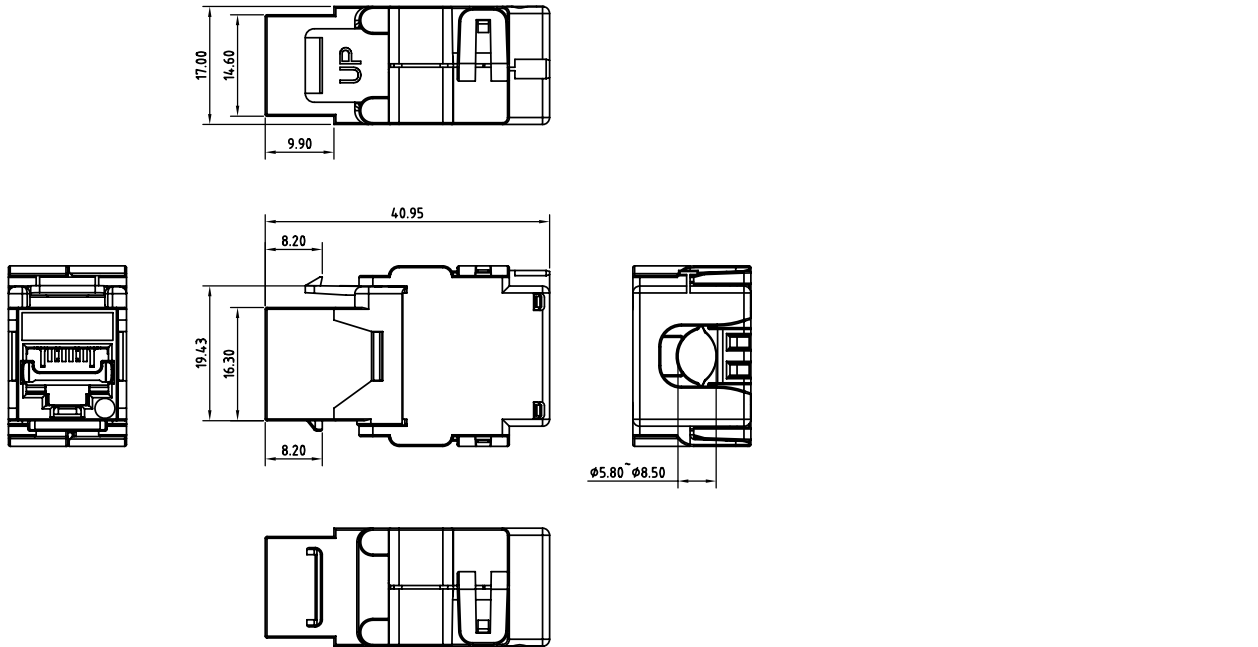

DESCRIPTION	ORDER NO.
TOOLLESS LINE Module RJ45 Jack shielded Cat.6 _A (ISO/IEC 11801 Amd.2)	HSEMRJ6GWA