


## ■ DATASHEET:

19" PDU FOR UPS, 8X UTE RED, 1X FUSE 10A, PROFILE ALU 1U,  
2M-CONNECTOR CABLE WITH IEC CONNECTOR C14, RAL7035

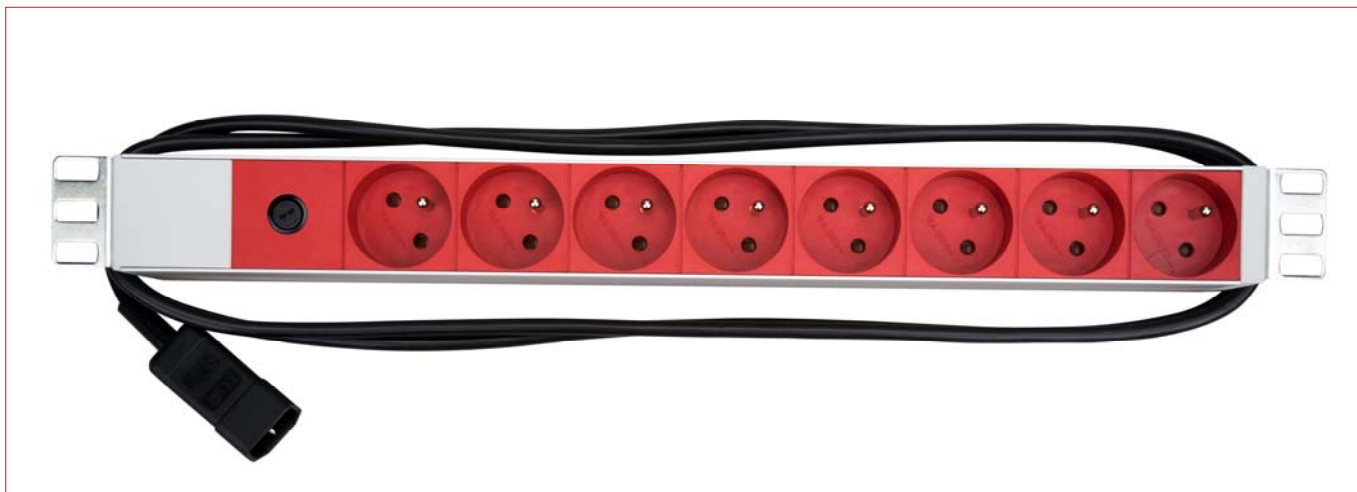


## ■ SCHRACK-INFO

The PDU is especially designed for UPS installed in 19" server-enclosures and/or datacenters. The IEC C14 connector is connected to the UPS and offers 8 red-marked UTE (french style) sockets for connection to operation-critical devices, like Servers, Routers, Ethernet-Switches, etc. Included is a changeable 10A-Fuse for protection of the C14 connector on the cable which is approved for 10A acc. to the standard IEC 60320.

## ■ TECHNICAL DATA

8 UTE/ French - sockets red with fuse 10 A	
Sockets:	according to NF-C61303 2-pole with earthing contact and child protection 16A/3600W, AC250V, IP20, colour red, 35° turned;
Connection:	non rewirable, Endcaps riveted, inside wiring without euro terminal Power cable 2,0m H05VV-F 3G1,5mm <sup>2</sup> with IEC C14 plug
Profile:	1U, ALU, anodized
Plastic material:	RAL7035, PA6 GF 30 V1, Glow wire resistant up to
Holding flanges :	Steel sheet. For fixing in 4 positions each 90°
Fuse:	Fuse 10A, exchangeable
Packing:	polybag
Extent of delivery:	1 x Socket outlet 2 x 19" mounting metal flanges (Loose)

## DIMENSIONS

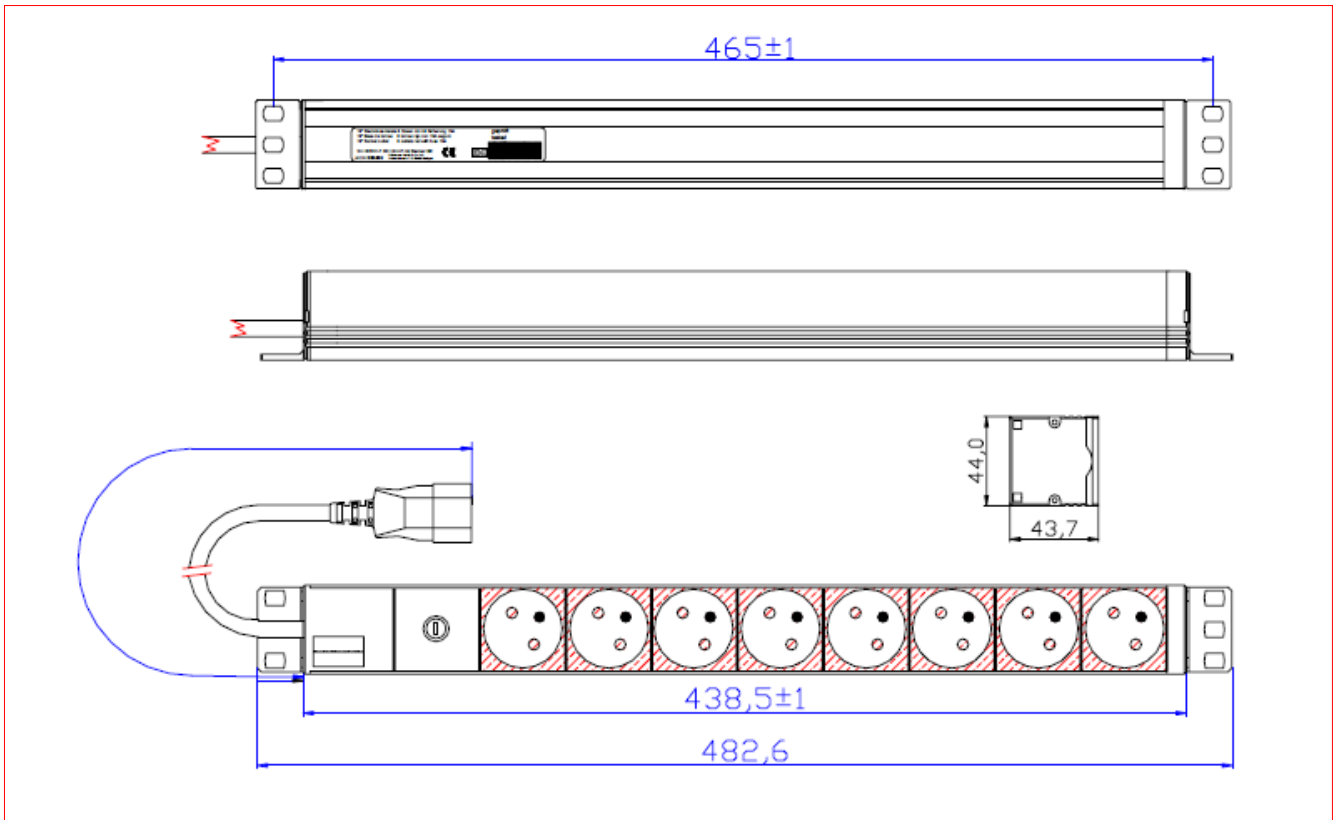

## PRODUCTS

DESCRIPTION	ORDER NUMBER
19" PDU for UPS, 8x UTE Red, 1x Fuse 10A, Profile ALU 1U, 2m-connector cable with IEC connector C14, RAL7035	IU070131—