


Perforated Panels IP30 for Data-Enclosures DS and DSZ



DSRR4281

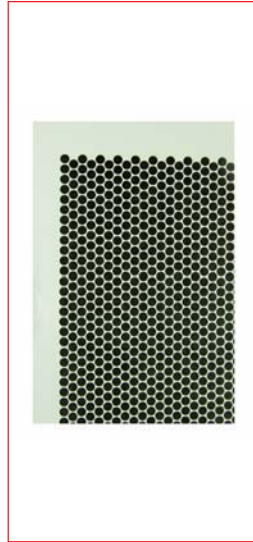

DSRR4281

SCHRACK-INFO

These perforated panels are suitable for installation to IP30 freestanding network enclosures SCHRACK DS and DSZ. Used as replacement of standard side- or rear-panel.

The perforated panels increase the passive cooling and are used in air-conditioned rooms and data-centers.

TECHNICAL DATA

- Frame: Welded, powder-coated sheet steel
- Color: RAL 7035 (lightgrey)
- Degree of protection: IP 30
- Permability of perforation: 80%.

DESCRIPTION	AVAILABLE	ORDER NO.
Perforated Rearpanel for Freestanding Enclosures W=600mm		
Rearpanel Metal perforated 80% permeability for DS/DSZ, 42U, W=600mm, RAL7035		DSRR4261
Rearpanel Metal perforated 80% permeability for DS/DSZ, 45U, W=600mm, RAL7035		DSRR4561
Perforated Rearpanel for Freestanding Enclosures W=800mm		
Rearpanel Metal perforated 80% permeability for DS/DSZ, 42U, W=800mm, RAL7035		DSRR4281
Rearpanel Metal perforated 80% permeability for DS/DSZ, 45U, W=800mm, RAL7035		DSRR4581
Perforated Sidepanel for Freestanding Enclosures D=600mm		
Sidepanel Metal perforated 80% permeability for DS/DSZ, 42U, D= 600mm, RAL7035		DSRS4261
Sidepanel Metal perforated 80% permeability for DS/DSZ, 45U, D= 600mm, RAL7035		DSRS4561
Perforated Sidepanel for Freestanding Enclosures D=800mm		
Sidepanel Metal perforated 80% permeability for DS/DSZ, 42U, D= 800mm, RAL7035		DSRS4281
Sidepanel Metal perforated 80% permeability for DS/DSZ, 45U, D= 800mm, RAL7035		DSRS4581
Perforated Sidepanel for Freestanding Enclosures D=1000mm		
Sidepanel Metal perforated 80% permeability for DS/DSZ, 42U, D=1.000mm, RAL7035		DSRS4211
Sidepanel Metal perforated 80% permeability for DS/DSZ, 45U, D=1.000mm, RAL7035		DSRS4511