


DATA SHEET: DATA CONNECTION SOCKET "CAT.6 LINE" RJ45 CAT6 SHIELDED/LSA

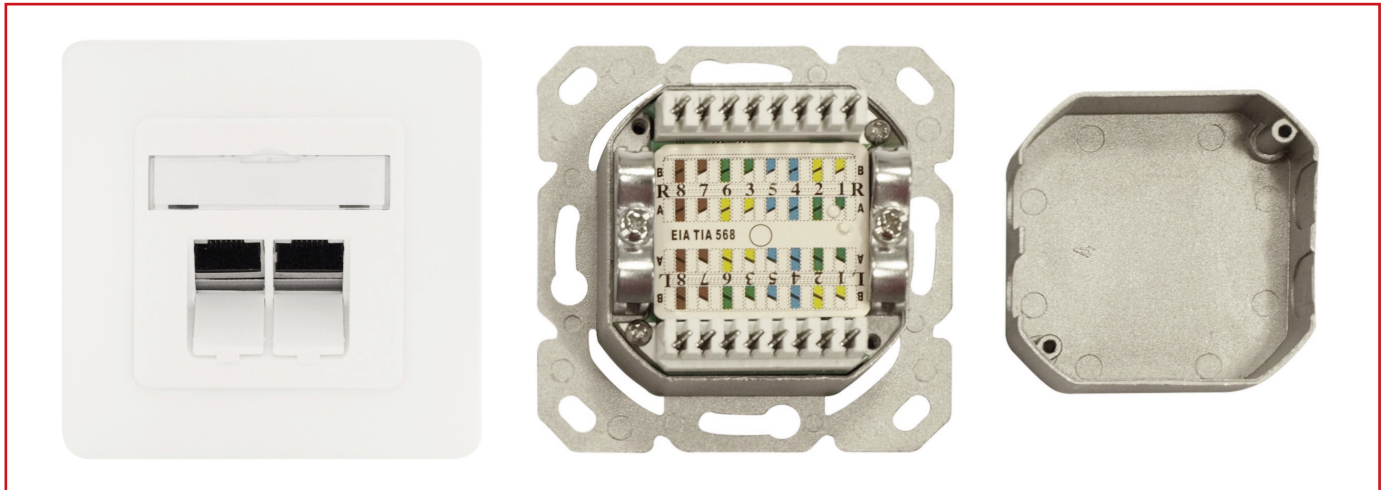

SCHRACK-INFO

Suitable for the transmission of analog and digital voice, image and data signals. Performance characteristics meet Class E up to 250 MHz according to ISO/IEC 11801:2002 and EN 50173-1:2003. Cable entry also possible in standard under compliance with the prescribed bend radii. Quick and easy installation. Suitable for installation in cable conduits, for flush- or surface mounting. Can also be installed in floor boxes by snapping off the upper and lower fixing lugs. Finding a matching design is no longer a problem as the outlet is compatible with all widely available switches with UAE cover plates.

TECHNICAL DATA

- Electrical characteristics: Cat 6
- Full-metal housing (die-cast zinc)
- Cover plate with captive screw
- Shielding: Generous 360° shielding
- RJ45 socket with LSA connection, EN 60603-7 (shielded)
- Configuration: 1-2, 3-6, 4-5, 7-8
- Extremely low installation depth (only 32 mm)
- Norms: ISO/IEC 11801:2002, EN 50173-1:2003, IEC 60603-7-5
- Includes central plate with window for labelling and 80 x 80 frame
- Cable assignments meet TIA 568 A and B colour code standards
- One outlet for flush-mounting (FM), recessed profile (RP), surface-mounting via extra frame (SM) and floor box (FB)

DESCRIPTION	ORDER NUMBER
CAT.6 LINE Data-Outlet 2xRJ45 shielded, Cat.6, 80x80, UAE, RAL9010	HSEDG2UW6P
Wallmount Box W80xH40xD80mm, RAL9010	HSEAP842WF
Set of screws for fixing of outlet to wallmount box	HSEDZBES