
 **Datasheet:**
 SAT loop-through type outlet 3-Port, Radio / CATV / SAT, Class A

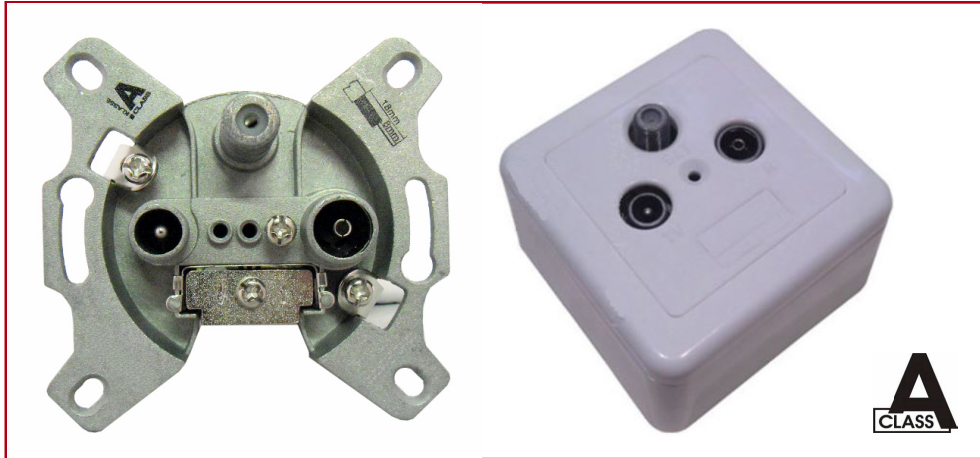

 **Technical data**

- Loop-through type outlet 3-Port, Radio/CATV/SAT
- Class A
- 4 - 2.400 MHz
- DC power pass
- Return path
- Broadband TV output
- Housing: Zinc die-cast
- Centralplate, 80x80mm frame and wallmount-box included
- Color: White RAL9010
- Compatible to Visio 50 switch-programme EV104010 (white) / EV114010 (anthracite)
- Compatible to ELSO switch-programme EL206034 (white)

Tap loss:	4 - 68 MHz Return path	10,5 dB
	87,5 - 108 MHz UKW	10,5 dB
	5 - 862 MHz TV terrestrial	10,5 dB
	950 - 2.050 MHz SAT-ZF	10,5 dB
	2.050 - 2.400 MHz SAT-ZF	11,0 dB
Through loss	4 - 68 MHz Return path	1,5 dB
	87,5 - 108 MHz UKW	1,5 dB
	5 - 862 MHz TV terrestrial	2,0 dB
	950 - 2.050 MHz SAT-ZF	2,5 dB
	2.050 - 2.400 MHz SAT-ZF	3,0 dB
Isolation:	TV / TV	> 40 dB
	TV / RF	> 40 dB
Screening factor	300 MHz	> 90 dB
	300 - 470 MHz	> 80 dB
	470 - 1.000 MHz	> 75 dB
	1.000 - 2.400 MHz	> 55 dB

DESCRIPTION	ORDER NO.
SAT loop-through type outlet 3-Port, Radio/CATV/SAT, 4 - 2.400MHz, DC power pass, return path, Class A, with 80x80mm frame and wallmount box, RAL9010	HSATDDM