


/// DATENBLATT / DATA SHEET:
GLASFASER-SPLEISSKASSETTE UNIVERSAL / SPLICETRAY UNIVERSAL

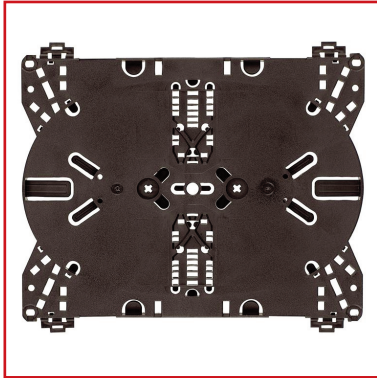

/// TECHNISCHE DATEN / TECHNICAL DATA

Anwendung / Application:	2 x 12 Schrumpf oder 2 x 12 Crimp / 2 x 12 Shrink or 2 x 12 Crimp
Größe / Dimensions:	168 x 125 mm
Material / Material:	Polypropylen PP 4408 (FS 61 T 20)
Hersteller / Manufacturer of raw material:	OMV / DPA / PP PCD
Verwendungszweck / Usage:	Spleisskassetten / Splicetray

Eigenschaften Properties	Einheit Unit	Wert Unit	Norm Standard	Bedingungen Clima
Dichte density	g/cm ³	1,04	DIN 53 479	23° C
Härte hardness shore D	Shore D	72	DIN 53 505	23° C
Streckspannung yield stress	Mpa	32 - 35	DIN 53 455	23° C
Streckdehnung elongation	%	6 - 8	DIN 53 455	23° C
3,5% Biegespannung 3,5% bending stress	Mpa	38 - 40	DIN 53 452	23° C

BEZEICHNUNG / DESCRIPTION	BEST.NR. / ORDER NO.
LWL Spleisskassette mit integrierten Kämmen für 24 Fasern / FO Splicetray with integral organisers for 24 fibers	HLZPZCC005