

GEP-1621 Version: 1



## 16-Port-Gigabit-PoE-Switch, 802.3af/at PoE

The LevelOne GEP-1621 is a Gigabit PoE-Plus Switch with 16 x 10/100/1000Base-T PoE-Plus ports. This switch is IEEE 802.3af/at compliant, providing power and data over a single Ethernet cable to any PoE device, with total power budget of 240W, up to 30W per port. Ideal for desktops, it is also 19-inch rack-mountable, which provides convenient and flexible installation. The GEP-1621 is designed for small-to-median businesses that prefers an affordable solution for PoE deploying infrastructure.



1. LED Indicators
2. 10/100/1000Mbps RJ-45 PoE Ports
3. Power Socket
4. Power Switch

### Key-features

- 16 PoE-Plus Gigabit Ethernet Ports
- 10/100/1000Mbps Übertragungsgeschwindigkeit
- IEEE-802.3af / at PoE kompatibel zur einfachen Verwendung und Installation
- Automatische Erkennung und Schutz von Nicht-Standard-PoE-Geräten
- 9K Jumbo-Frames für hohe Transferraten
- Unterstützt Auto-Learning und Auto-Aging für bis zu 8K MAC-Adressen
- IEEE-802.3x Flow-Control schützt vor Packet-Loss und sorgt für zuverlässige Datenübertragung
- Minimiert den Stromverbrauch durch moderne Energieeffizienz (IEEE-802.3az)
- 19" Metallgehäuse
-



## Related Product



### **POR-1220**

Gigabit PoE Repeater, kaskadierbar, Innen / Außen

## Specifications

### System Specifications

#### Standards & Protokolle:

IEEE 802.3 10-BASE-T, Ethernet  
IEEE 802.3u 100-BASE-TX, Fast Ethernet  
IEEE 802.3ab 1000BASE-T, Gigabit Ethernet  
IEEE 802.3x Flow Control (full-duplex flow control)  
IEEE 802.3af Power over Ethernet (PoE)  
IEEE 802.3at Power over Ethernet Plus (PoE+)  
IEEE 802.3az Energy-Efficient Ethernet

#### Pufferspeicher:

256KB

#### Stecker:

16 x RJ-45 10/100/1000Base-T PoE-Plus ports

#### Indikator:

Power; Link/Active; PoE

#### Übertragungsmethode:

Store-and-Forward

#### Leistungsaufnahme:

100-240V AC, 50-60 Hz, Internal Power Supply

#### Energieverbrauch:

< 120W (GEP-1621W120)  
< 150W (GEP-1621W150)  
< 250W (GEP-1621)  
< 380W (GEP-1621W380)

#### Backplane (Gbps):

32Gbps

#### MAC-Adresstabelle:

8K

#### Datenrate:

10/100/1000Mbps

### Features

#### Allgemein:

Flow Control: Half Duplex - Backpressure; Full Duplex - Pause frame

#### PoE:

Power Budget:Max. 110W (GEP-1621W120)

Max. 140W (GEP-1621W150)

Max. 240W (GEP-1621)

Max. 370W (GEP-1621W380)

Power Output: Up to 30W per port

Protection: Circuit protection to prevent power interference between ports

Pin Assignment: 1/2(+), 3/6(-)

## Performance

### Weiterleitungsrate:

1000Mbps port - 1,488,000pps

100Mbps port - 148,000pps

10Mbps port - 14,880pps

### Jumbo-Frames:

9KB

## Environment

### Energieeffizienz:

IEEE 802.3az Energy Efficient Ethernet:

- Automatically turns power off on RJ-45 port when detecting link down or Idle of client
- Cable length detection: Adjusts the signal strength based on the cable length
- Reduces the power consumption for cables shorter

### Temperatur (°C):

Operating: 0°C ~ 50°C

Storage: -40°C ~ 70°C

### Luftfeuchtigkeit (nicht kondensierend):

Storage: 5% ~ 90%

Operating: 5% ~ 90%

### Einsatz:

19-inch rack-mountable

## Physical Specifications

### Abmessungen (W x D x H mm):

480 x 200 x 44 mm

### Gewicht:

2900g

## Zuverlässigkeit

### MTBF:

48300 hours


## Approval and Compliance

### Zertifizierung:

FCC Part 15 Class A, CE, RoHS



## Diagramm

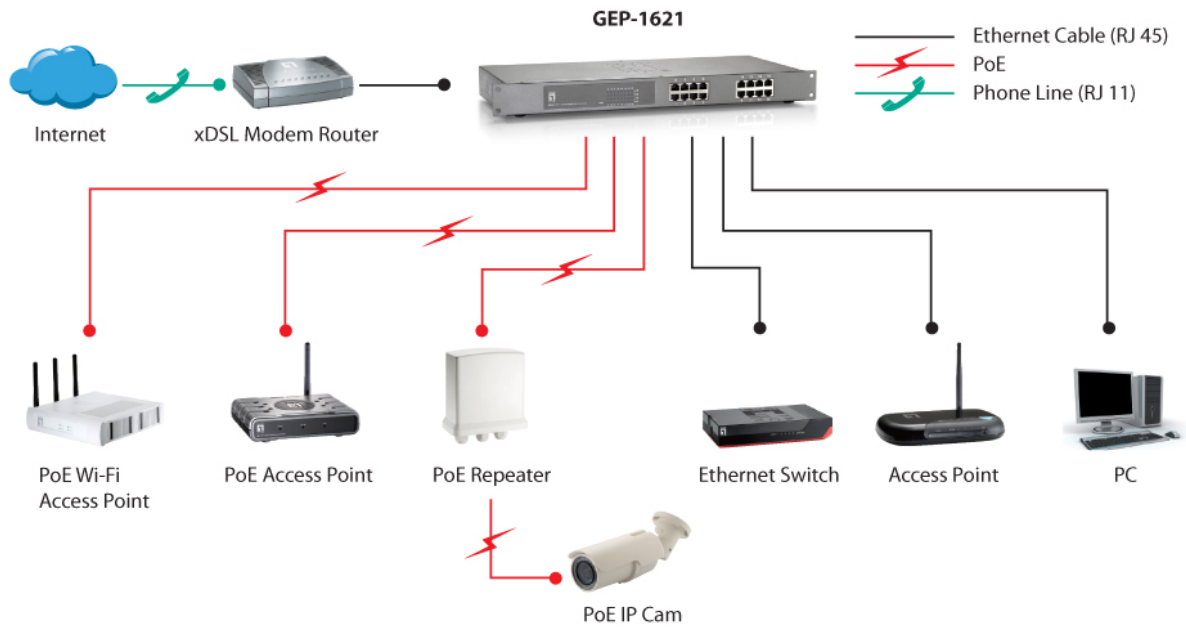

---

## Order Information

GEP-1621: 250W  
GEP-1621W380: 380W  
GEP-1621W150: 150W  
GEP-1621W120: 120W

---

## Package Contents

GEP-1621  
Stromkabel  
Quick Installation Guide

No liability or responsibility for any errors or omissions in the content.  
Specifications are subject to change without notice.  
All mentioned brand names are registered trademarks and property of their owners.  
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.