

Domestic consumer unit enclosures wall-mounted IP30 without sheet steel door



BK003121



BK003122



BK003123



BK003124



BK003102



BK003105

Schrack-Info


- 1- to 4-row enclosures made of plastic with insertion possibilities from all sides and large wiring space
- Optionally available doors in plastic-coated steel sheet with flush designer handle, opening angle over 180°, hinges optionally right or left
- PE/N terminals with snap-on mounting
- Device rows for 12 modules (extendable to 14 modules)
- Protection class II
- Degree of protection IP30
- RAL9010 pure white



Domestic consumer unit enclosures and distribution boards

Domestic consumer unit enclosures wall-mounted IP30 without sheet steel door

Dimensions BK003124

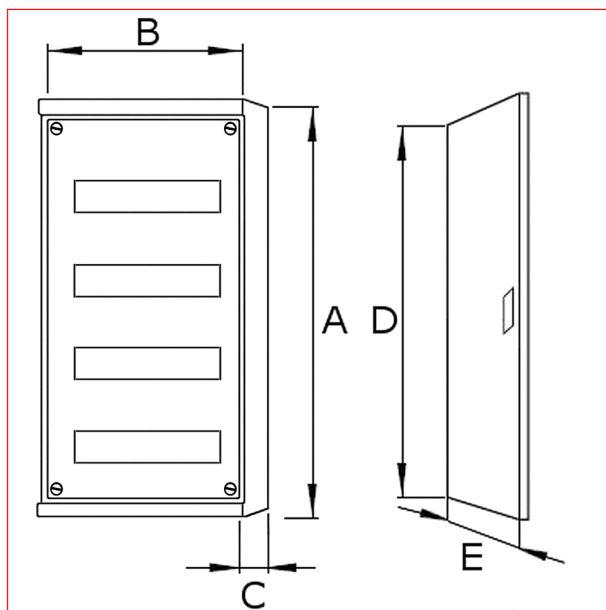

Article number	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	Rows	MW	N-terminal [mm ²]	PE-terminal [mm ²]	Radiant power loss [W]*
BK003121	250	305	99	-	-	1	12+2	3x25 + 14x4	3x25 + 14x4	-22
BK003122	375	305	99	-	-	2	24+4	3x25 + 14x4	3x25 + 14x4	-26
BK003123	515	305	99	-	-	3	36+6	6x16 + 28x10	6x16 + 28x10	-30
BK003124	640	305	99	-	-	4	48+8	6x16 + 28x10	6x16 + 28x10	-36
BK003101	-	-	-	227	283	-	-	-	-	-
BK003102	-	-	-	353	283	-	-	-	-	-
BK003103	-	-	-	493	283	-	-	-	-	-
BK003104	-	-	-	618	283	-	-	-	-	-

*Max. radiated power of housing calculated as a wall-mounted single fixed with $\Delta T = 35K$.

DESCRIPTION	WxHxD mm	AVAILABLE	ORDER NO.
Enclosure RAL9010			
1-row, 12MW without door	305x250x99		BK003121
2-rows, 24MW without door	305x375x99		BK003122
3-rows, 36MW without door	305x515x99		BK003123
4-rows, 48MW without door	305x640x99		BK003124
Sheet steel door RAL9010			
Door for BK003121, 1-row	283x227x12		BK003101
Door for BK003122, 2-rows	283x353x12		BK003102
Door for BK003123, 3-rows	283x493x12		BK003103
Door for BK003124, 4-rows	283x618x12		BK003104
Accessory			
Door lock for BK003101 - 104	20x26x15		BK003105