

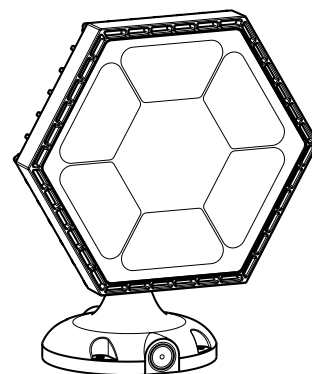
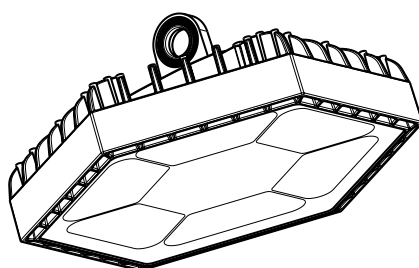



HIGHBAY - FLOODLIGHTS

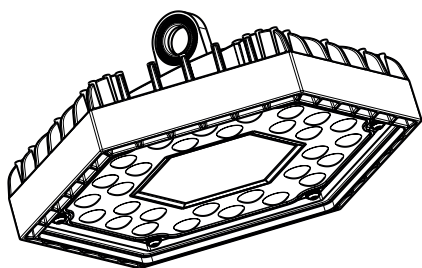

$t_a +50^{\circ}\text{C} / t_q 25^{\circ}\text{C}$



	IP			
	IP65			
	IP66			




	Kg			
	2,8 Kg	Max. 15 m	0,06 m ²	0,02 m ²
	3,3 Kg	Max. 15 m	0,06 m ²	0,02 m ²
	3,8 Kg	Max. 15 m	0,07 m ²	0,03 m ²

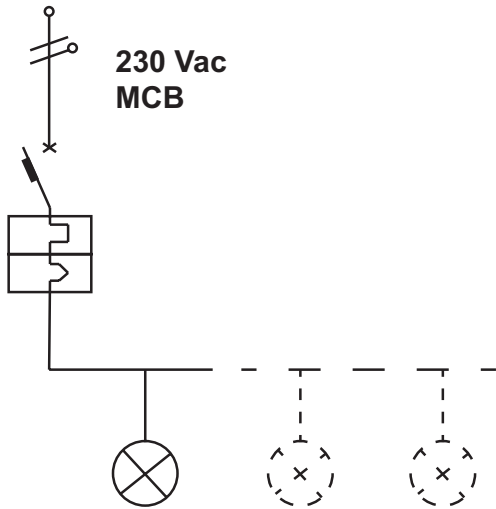

MCB Type B	10A	16A	20A
	1	2	3
MCB Type C	10A	16A	20A
	3	6	8
MCB Type D	10A	16A	20A
	8	12	14

	≤ 5700K			
	30°	60°	90°	Elliptical
	RG1:	RG1:	RG1:	RG1:
	2,5 m	3,5 m	3 m	4 m

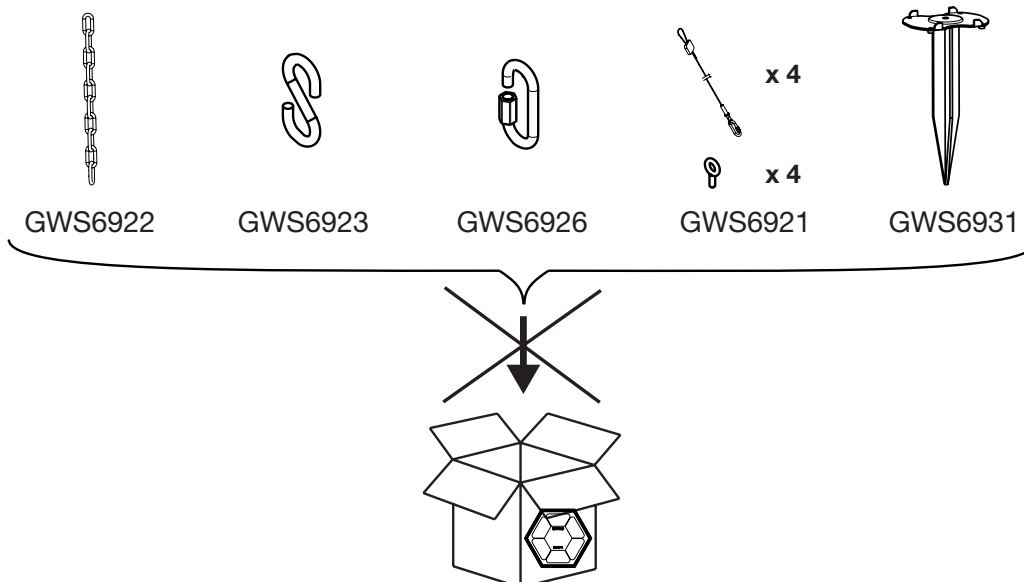


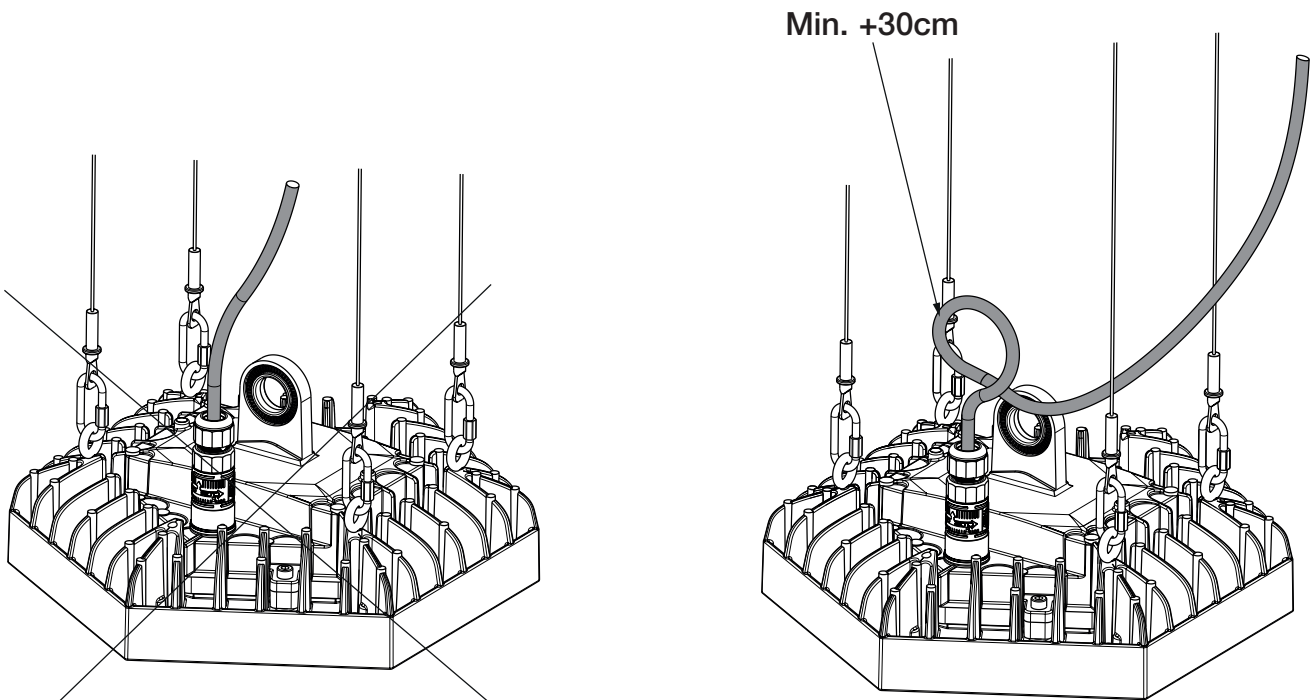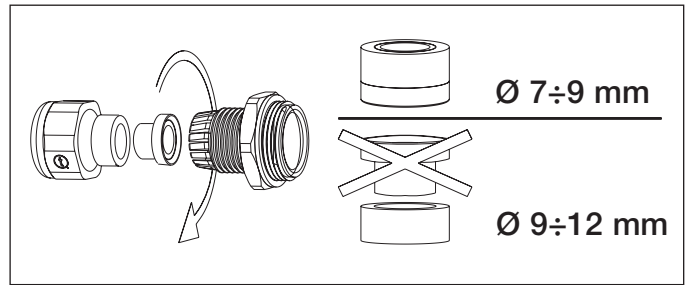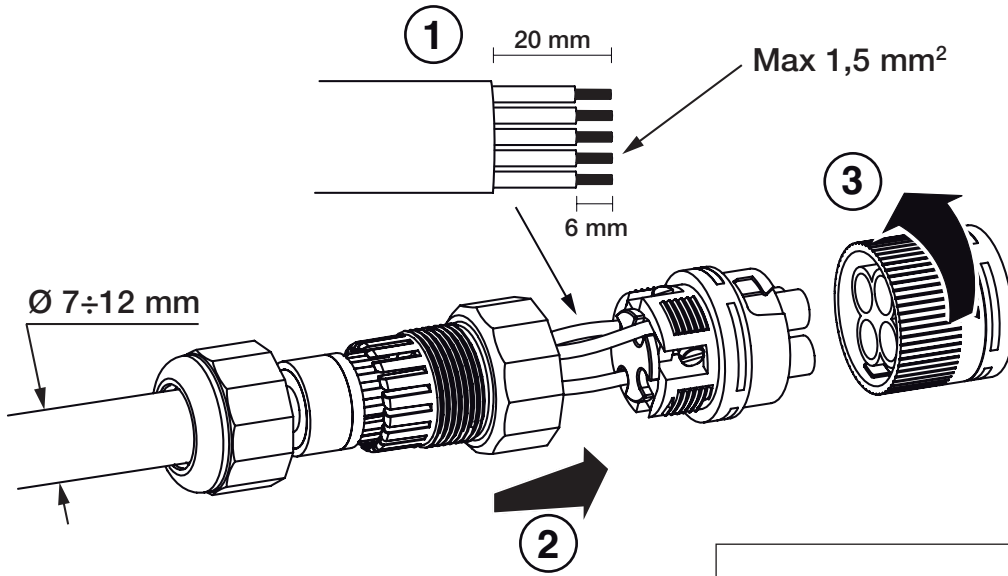




30° - 60° - 90°



ELLIPTICAL

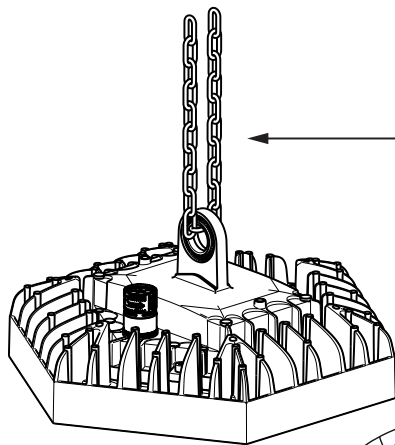

GWS6922

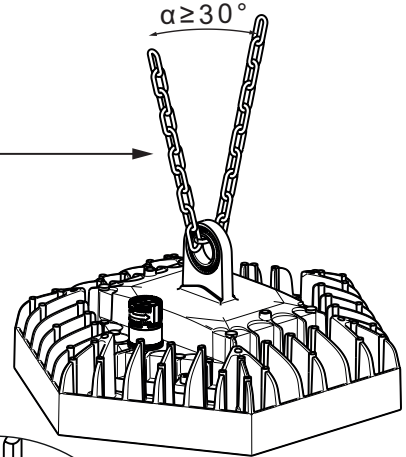


GWS6923

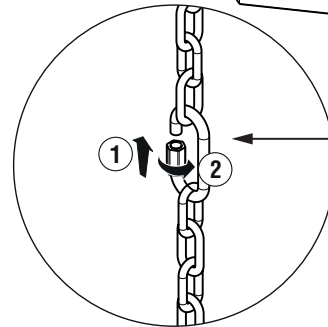







GWS6926



30° - 60° - 90°

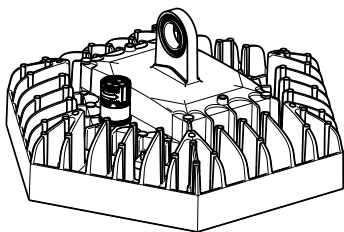


+

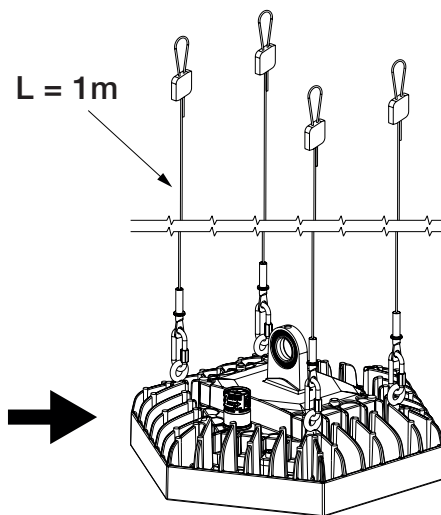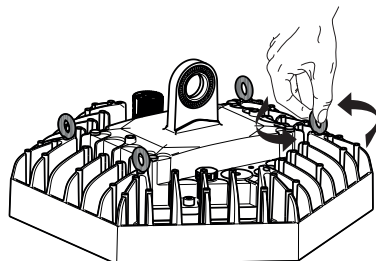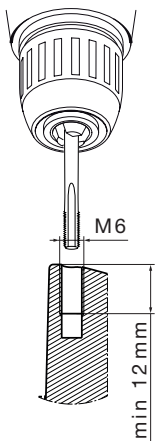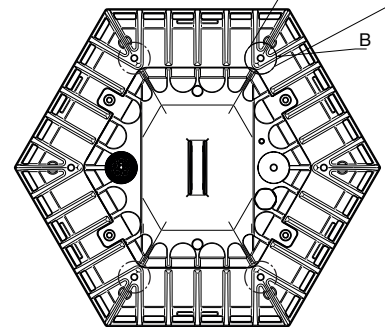
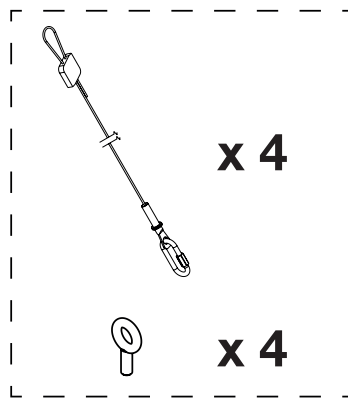






ELLIPTICAL








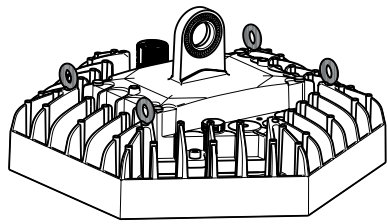


+

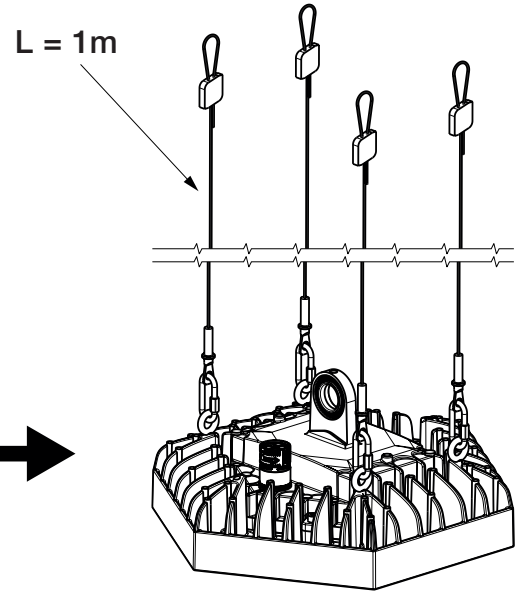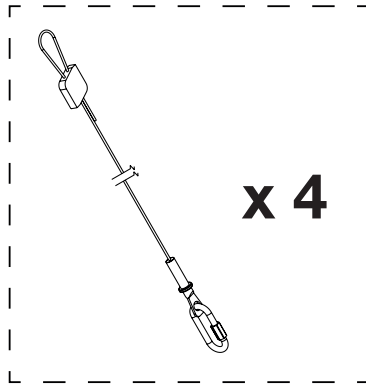




30° - 60° - 90° - ELLIPTICAL

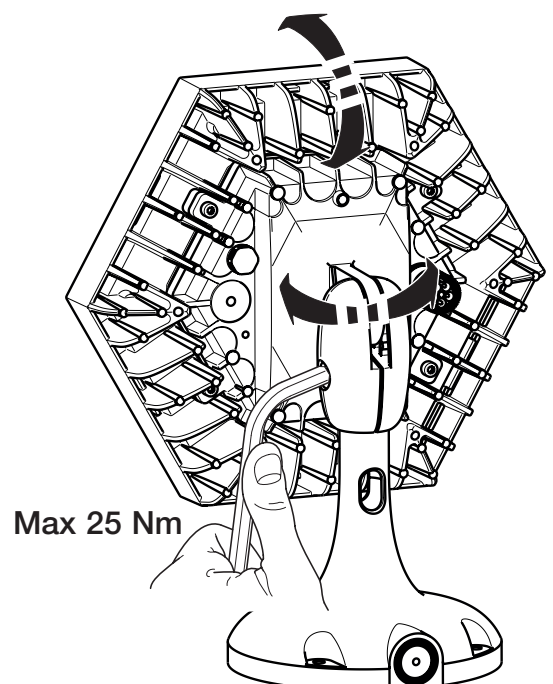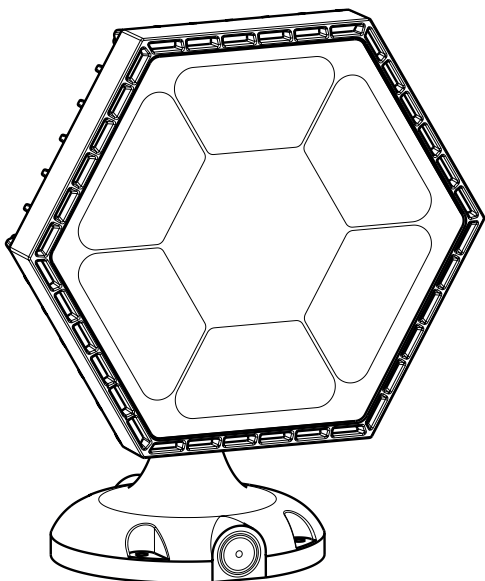

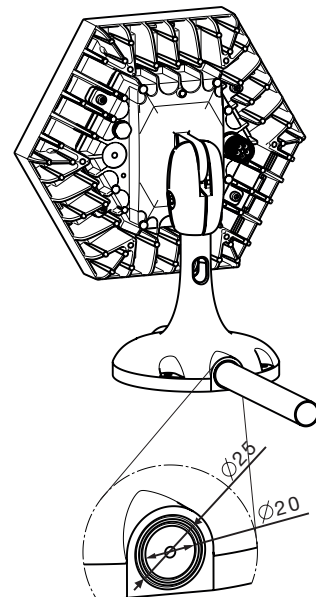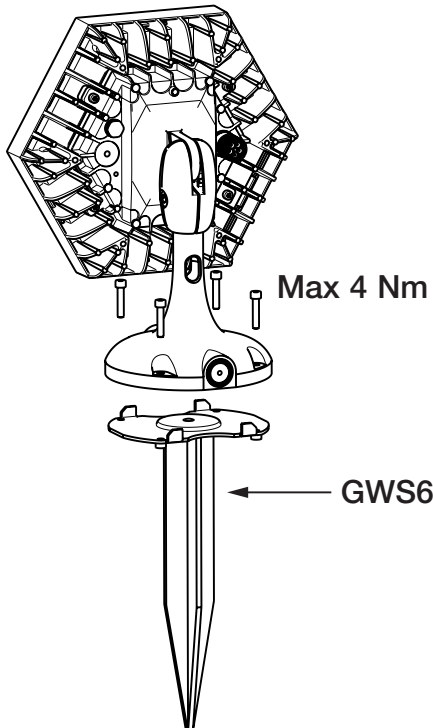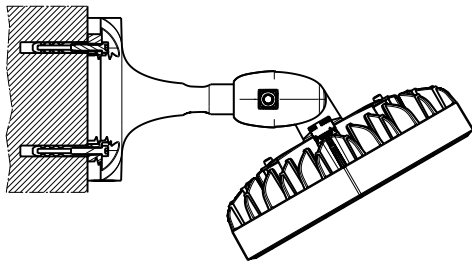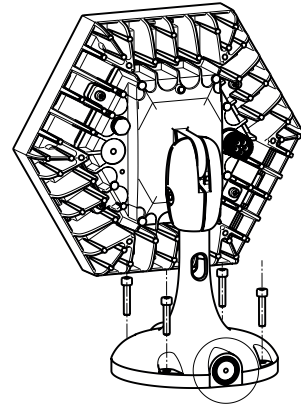
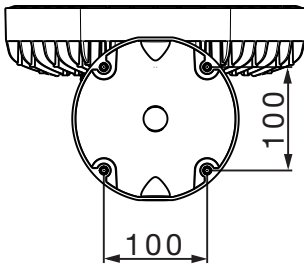
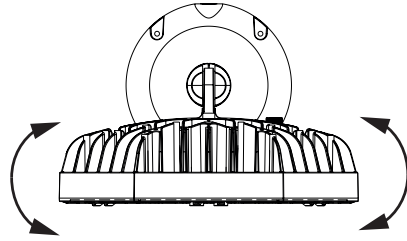
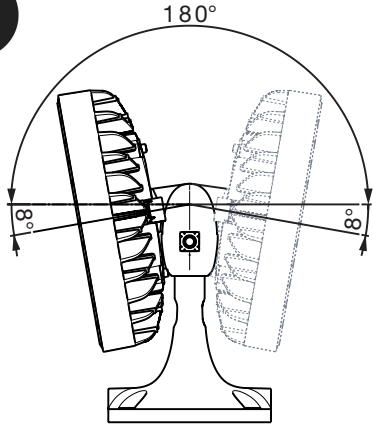




ON REQUEST

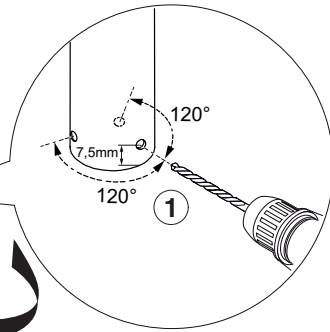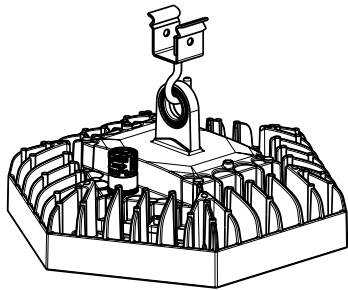

		OK	
		OK	

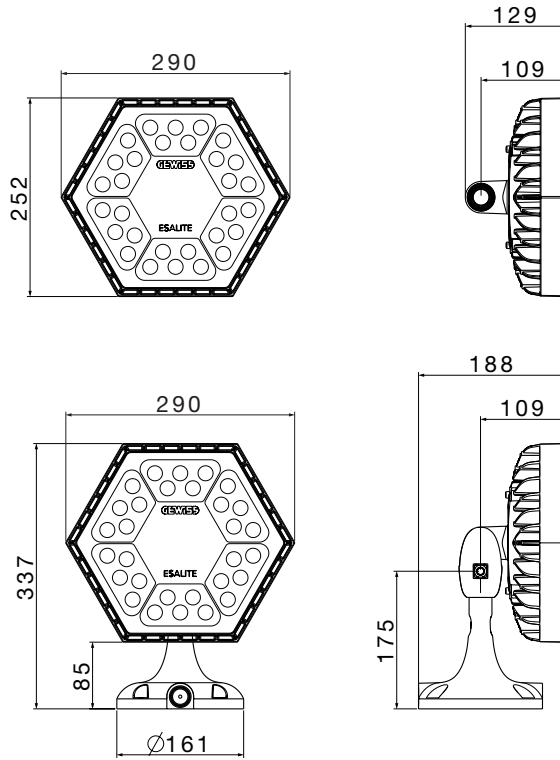

Punto di contatto indicato in adempimento ai fini delle direttive e regolamenti UE applicabili:

Contact details according to the relevant European Directives and Regulations:

GEWISS S.p.A. Via A.Volta, 1 IT-24069 Cenate Sotto (BG) Italy tel: +39 035 946 111 E-mail: qualitymarks@gewiss.com



+39 035 946 111
8.30 - 12.30 / 14.00 - 18.00
lunedì - venerdì - monday - friday



+39 035 946 260



sat@gewiss.com
www.gewiss.com