

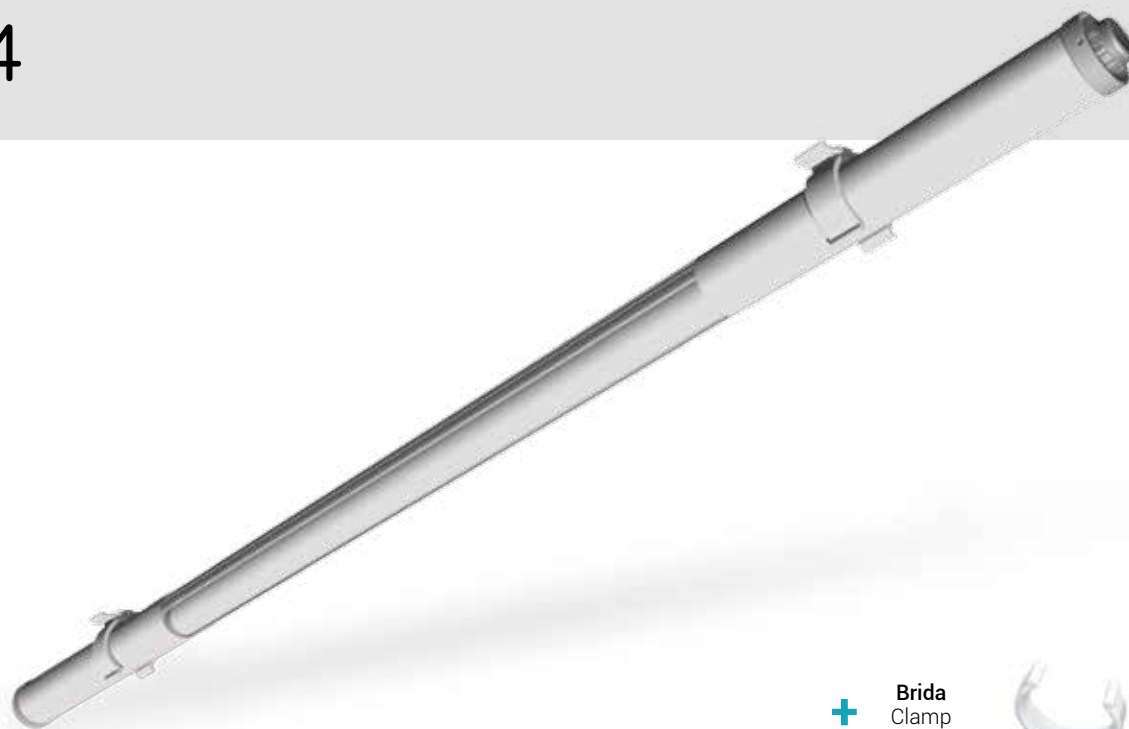





1.20



TR4



Brida
Clamp
Collier



APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES

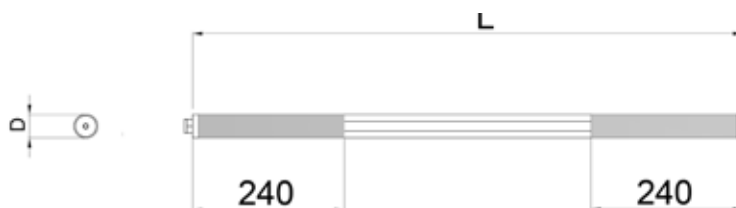

IT - DE

IP67

IK07

CE

EN 60598-1




TUBO FLUORESCENTE / LAMP / LAMPE


T5

Ref.	Potencia Watts Puissance	Equipo Equipment Ballast	L	D	Embalaje Packaging Emballage
	(W)		(mm)	(mm)	
R0051	1 x 14	■	1.038	41	1
R0031	1 x 24	■	1.038	41	1
R0015	1 x 18	■	1.080	41	1
R0052	1 x 21	■	1.335	41	1
R0055	1 x 39	■	1.510	41	1
R0053	1 x 28	■	1.800	41	1
R0056	1 x 54	■	1.800	41	1
R0016	1 x 36	■	1.940	41	1
R0054	1 x 35	■	2.100	41	1
R0032	1 x 49	■	2.100	41	1
R0017	1 x 58	■	2.240	41	1
R0033	1 x 80	■	2.330	41	1

■ Electrónica / Electronic / Électronique



1x



2x

1.20

TR4 ALUMINIUM




+ **Brida**
Clamp
Collier



TUBO FLUORESCENTE / LAMP / LAMPE


T8



Ref.	Potencia Watts Puissance	Equipo Equipment Ballast	L	D	Embalaje Packaging Emballage
	(W)		(mm)	(mm)	
R0115	1 x 18	■	1.080	41	1
R0116	1 x 36	■	1.940	41	1
R0117	1 x 58	■	2.240	41	1

TUBO FLUORESCENTE / LAMP / LAMPE

T5



Ref.	Potencia Watts Puissance	Equipo Equipment Ballast	L	D	Embalaje Packaging Emballage
	(W)		(mm)	(mm)	
R0151	1 x 14	■	1.038	41	1
R0161	1 x 24	■	1.038	41	1
R0152	1 x 21	■	1.335	41	1
R0155	1 x 39	■	1.510	41	1
R0153	1 x 28	■	1.800	41	1
R0156	1 x 54	■	1.800	41	1
R0154	1 x 35	■	2.100	41	1
R0163	1 x 49	■	2.100	41	1
R0164	1 x 80	■	2.330	41	1

■ Electrónica / Electronic / Électronique

IP67


IK07

CE

EN 60598-1

ACCESORIOS TR4 / TR4 ACCESORIES / ACCESSOIRES TR4

TR4 OPAL

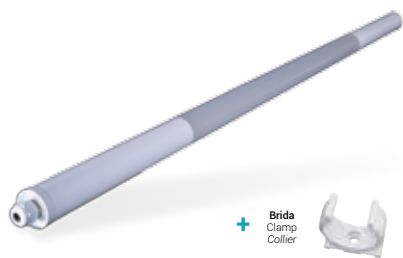

+
Brida
Clamp
Collier

Ref.

Potencia
Watts
Puissance

(W)

18

36

58

14-24

21

35-49

39

80

Ref luminaria + "O". Ej.: R00150
Light fitting ref + "O". Ex.:R00150
Ref luminaire + "O". Ex.: R00150

1.20

TR4

TR4 LED



BLANCO / WHITE / BLANC



OPAL / MATTE / OPALE

T8

Ref.	Longitud Tubo Tube Length Longueur Tube	L	D	Embalaje Packaging Emballage
	(mm)	(mm)	(mm)	
R0015L	1 x 600	780	41	1
R0016L	1 x 1.200	1.380	41	1
R0017L	1 x 1.500	1.680	41	1

ALUMINIO / ALUMINIUM / ALUMINIUM

T8

Ref.	Longitud Tubo Tube Length Longueur Tube	L	D	Embalaje Packaging Emballage
	(mm)	(mm)	(mm)	
R0115L	1 x 600	780	41	1
R0116L	1 x 1.200	1.380	41	1
R0117L	1 x 1.500	1.680	41	1

TR4 Opal

Ref.	Longitud Tubo Tube Length Longueur Tube
	(mm)
Ref luminaria + "O". Ej.: R0115LO	600
Light fitting ref + "O". Ex.: R0115LO	900
Ref luminaire + "O". Ex.: R0115LO	1200
	1500

IP67

IK07

CE

EN 60598-1

ACCESORIOS TR4 / TR4 ACCESORIES / ACCESSOIRES TR4



Ref.

R0057

Bridas de acero inoxidable
Stainless steel clamps
Colliers inox antivandalisme



R0063

Tapas metálicas y racor metálico
Metallic end caps and cable glands
Embouts et presse-étoupes métalliques



Q0349

Suspensión con cable de acero
Steel cable suspension
Suspension avec câble en acier

LÍNEA CONTINUA

CONTINUOUS LINE CONNECTION
CÂBLAGE TRAVERSANT

3 polos / 3 poles / 3 pôles





























































Ref. R0058

5 polos / 5 poles / 5 pôles

Ref. R0064

1-10
DALI

EMERGENCY
1h / 3h

	Cuerpo luminaria tubo policarbonato Polycarbonate luminaire body Corps du luminaire tube polycarbonate		Cuerpo extrusion Aluminum body Corps aluminium		Rango de temperaturas Temperatures range Tranche de temperatures
	Cuerpo luminaria metacrilato Methacrylate luminaire body Corps du luminaire méthacrylate		Cuerpo Acero Prelacado Pre-lacquered steel body Corps en acier prélaqué		Ensayo hilo Glow wire test Essais fil incandescent
	Cuerpo luminaria vidrio borosilicato Glass borosilicate luminaire body Corps du luminaire verre borosilicate		Cuerpo Aluminio Prelacado Pre-lacquered aluminum body Corps en aluminium prélaqué		Alto factor High Factor Hautes temperatures
	Cuerpo luminaria ABS ABS luminaire body Corps du luminaire ABS		Cuerpo ABS ABS body Corp ABS		Conector rápido Quick Connector Connecteur rapide
	Cuerpo luminaria poliestireno Polystyrene luminaire body Corps du luminaire polystyrène		Difusor Policarbonato Polycarbonate Diffuser Diffuseur Polycarbonate		Entrada cablesosca M25 (2e) M25 Cable entry (2e) Entrée de câbles a vis M25 (2e)
	Cuerpo aluminio Extrusion Aluminum Body Corps extrusion aluminium		Difusor Policarbonato Opal Opal Polycarbonate Diffuser Diffuseur Polycarbonate Opal		Regulación de flujo Dimmable equipment Ballast gradable
	Cuerpo hierro Iron body Corps fer		Difusor Poliestireno Polystyrene Diffuser Diffuseur Polystyrène		Módulo LED LED Module Modules LED
	Tapas Aluminio pintado Painted Aluminum end caps Embouts aluminium peint		Difusor PC/ACRIL PC/ACRIL Diffuser Diffuseur PC/ACRIL		Tubo LED LED Tube Tube LED
	Tapa acero INOX Stainless Steel 304 end caps Embouts INOX 304		Lamas ABS ABS louvers Lames ABS		Tubo fluorescencia Fluorescent Tube Tube Fluorescent
	Tapa acero INOX Stainless Steel 316 end caps		Lamas ABS - PC ABS - PC Louvers Lames ABS - PC		Tubo LED o Tubo fluorescente LED Tube or fluorescent tube Tube LED ou Tube fluorescent
	Tapas ABS ABS Plastic end caps Embouts PLASTIQUE ABS		Abrazaderas acero cincado Galvanized Steel Clamps Fixations acier zingué		Fuente de luz Light source Source de lumière
	Tapas Policarbonato PC Plastic end caps Embouts PLASTIQUE PC		Brazaderas acero inox Stainless Steel Clamps Fixations INOX		Fuente de luz Light source Source de lumière
	Tapas Plástico Metalizado Metalized Plastic end caps Embouts PLASTIQUE CHROMÉ		Abrazaderas cierre rápido Quick opening stainless steel Fixations INOX ouverture à grenouillère		Fuente de luz Light source Source de lumière
	Tapas Zamak Niquelado Nickel-plated ZAMAK end caps Embouts ZAMAK NICKELÉ		Abrazaderas PC antivandálica Vandalism PC Clamps Fixations INOX ouverture à grenouillère		Zona ATEX EX Area ATEX Zone
	Tapas acero niquelado Nickel-plated steel end caps Embouts Acier Nickelé		Abrazaderas ABS ABS Clamps Fixations PMMA antivandalisme		Sistema de emergencia Emergency Sistem Système d'urgence
	Aluminio Anodizado Anodized aluminum Aluminium anodisé		Aro ABS ABS Ring Fixations ABS		Grupo de riesgo fotobiológico Photobiological risk group Group de risque photobiologique
	Reflector Aluminio brillo Reflector Aluminum Gloss Réflecteur Aluminium brillant		Abrazaderas techo o pared Ceiling or wall Clamps Fixations murs et parois		Índice MacAdam MacAdam Ellipse Taux MacAdam
	Reflector chapa lacada blanca White lacquered steel Reflector Réflecteur tôle lacquée blanc		Prensaestopa Cable Gland Presse étoupes		Índice de deslumbramiento unificado Unify glare rating Taux d'éblouissement
	Reflector acero lacado blanco White Lacquered Steel Reflector Réflecteur acier lacqué blanc		Empotrable para lámpara Embedded for lamps Encastrable pour lamp		Índice cromático Chromatic Index Taux chromatique
	Reflector acero galvanizado Galvanized Steel Reflector Réflecteur acier galvanisé		Brida suspensión perforación 18mm Clamps suspension borehole 18 mm Fixation avec suspension perforation 18 mm		Vida útil Useful life Durée de vie