

# xside

**3 YEARS  
WARRANTY**



## EN

Recessed adjustable light fittings, for interior, equipped with COB LEDs.

Frame and body of die-cast aluminum, electrostatically painted.

Housing of steel sheet, electrostatically painted.

Reflector of chromed polycarbonate and clear glass diffuser.

Constant current LED driver has to be ordered separately.

### Range of applications

General or accent lighting in shops.

## RO

Corpuri de iluminat pentru montaj încadrat în interior, orientabile, echipate cu LED-uri COB.

Rama și corpul din aluminiu turnat, vopsite în câmp electrostatic, carcasa din tablă de oțel, vopsită în câmp electrostatic.

Reflector din policarbonat cromat, dispersor din sticlă clară.

Alimentatorul în curent constant se comandă separat.

### Aplicații

Iluminat general sau de accent în magazine.

## IT

Incassi orientabili per interni, dotati di LED COB.

Telaio e corpo in alluminio pressofuso, verniciati a polveri.

Carcassa in lamiera di acciaio verniciata a polveri.

Riflettore in policarbonato cromato, diffusore in vetro trasparente.

Alimentatore a corrente costante da ordinare separatamente.



### Campi di applicazione

Illuminazione generale o d'accento, negozi.

## SD01

FINISHING AVAILABLE

MWH

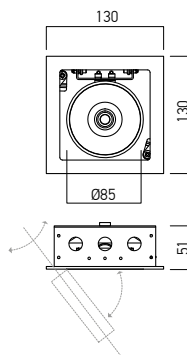

### Recommended CC Drivers





Code	Finishing	LED type	Power	Input current	Driver	LED Flux	System Flux	CCT	CRI	Optics	Weight	
SD01WW40 MWH	MWH	COB BRIDGELUX	1x7W	350 mA	Excluded	618 lm	491 lm	3000K	90	40°	120x120 mm	0.60 kg
SD01NW40 MWH	MWH	COB BRIDGELUX	1x7W	350 mA	Excluded	655 lm	557 lm	4000K	80	40°	120x120 mm	0.60 kg

### SD02

FINISHING AVAILABLE

MWH

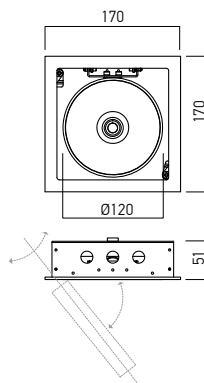

#### Recommended CC Drivers





Code	Finishing	LED type	Power	Input current	Driver	LED Flux	System Flux	CCT	CRI	Optics	⌀	Weight
SD02WW50 MWH	MWH	COB BRIDGELUX	1x15W	700 mA	Excluded	1241 lm	973 lm	3000K	90	50°	160x160 mm	1,04 kg
SD02NW50 MWH	MWH	COB BRIDGELUX	1x15W	700 mA	Excluded	1302 lm	1106 lm	4000K	80	50°	160x160 mm	1,04 kg

### SD03

FINISHING AVAILABLE

MWH



#### Recommended CC Drivers





Code	Finishing	LED type	Power	Input current	Driver	LED Flux	System Flux	CCT	CRI	Optics	⌀	Weight
SD03WW31 MWH	MWH	COB BRIDGELUX	1x6.2W	350 mA	Excluded	775 lm	556 lm	3000K	90	31°	120x120 mm	0,62 kg
SD03NW31 MWH	MWH	COB BRIDGELUX	1x6.2W	350 mA	Excluded	825 lm	593 lm	4000K	90	31°	120x120 mm	0,62 kg

### SD04

FINISHING AVAILABLE

MWH

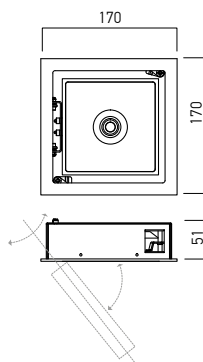

#### Recommended CC Drivers



Code	Finishing	LED type	Power	Input current	Driver	LED Flux	System Flux	CCT	CRI	Optics	⌀	Weight
SD04WW37 MWH	MWH	COB BRIDGELUX	1x15.5W	700 mA	Excluded	1750 lm	1308 lm	3000K	90	37°	160x160 mm	1,11 kg
SD04NW37 MWH	MWH	COB BRIDGELUX	1x15.5W	700 mA	Excluded	1860 lm	1394 lm	4000K	90	37°	160x160 mm	1,11 kg