

XCLIPPER

SURFACE MOUNTING LIGHT FITTINGS
CORPURI DE ILUMINAT APARENTE
APPARECCHI A SOFFITTO/PARETE



EN

Surface mounting light fittings, with opal polycarbonate diffuser, equipped with linear SMD LEDs modules, warm white, neutral white or cool white color temperature.

HOUSING

Housing and sides of white polycarbonate. Set of two steel fixing clips.

OPTICAL SYSTEM

Diffuser of opal polycarbonate.

ELECTRIC GEAR

Power supply 180-265V, 50/60Hz and constant current LED driver included. Power supply cable 2P (10A/250V/1mm²).

RANGE OF APPLICATIONS

General interior lighting.

RO

Corpuri de iluminat pentru montaj aparent, cu dispersor opal din policarbonat, echipate cu module liniare cu LED-uri SMD, temperaturi de culoare alb cald, alb neutru sau alb rece.

CORP

Carcasa și părțile laterale din policarbonat de culoare albă. Set de două cleme de fixare din oțel.

SISTEM OPTIC

Dispersor opal din policarbonat.

APARATAJ DE ALIMENTARE

Tensiune de alimentare 180-265V, 50/60Hz, alimentator în curent constant încorporat. Cablu de alimentare 2P (10A/250V/1mm²).

APLICAȚII

Iluminatul general de interior.

IT

Apparecchi da superficie con diffusore opalino in policarbonato, equipaggiati con moduli lineari a LED SMD, temperature di colore bianco caldo, bianco neutro o bianco freddo.

CORPO

Struttura e testate di chiusura in policarbonato bianco. Set di due ganci in acciaio per fissaggio.

SISTEMA OTTICO

Diffusore opalino in policarbonato.


ALIMENTAZIONE

Alimentazione 180-265V, 50/60Hz, alimentatore in corrente costante incluso. Cavo di alimentazione 2P (10A/250V/1mm²).

CAMPI DI APPLICAZIONE


Illuminazione generale interna.

CP01



Code	Finishing	LED type	Number of LED	Power	Input voltage	Input frequency	Luminous flux	LED color temperature	Driver	Optics	CRI	Weight
CP01WW	○	SMD 2835 HONGLI	96	18W	180-265V	50/60Hz	1703 lm	3000K	Included	180°	80	0,16 kg
CP01NW	○	SMD 2835 HONGLI	96	18W	180-265V	50/60Hz	1786 lm	4000K	Included	180°	80	0,16 kg
CP01CW	○	SMD 2835 HONGLI	96	18W	180-265V	50/60Hz	1798 lm	6000K	Included	180°	80	0,16 kg



CP02



Code	Finishing	LED type	Number of LED	Power	Input voltage	Input frequency	Luminous flux	LED color temperature	Driver	Optics	CRI	Weight
CP02WW	○	SMD 2835 HONGLI	192	36W	180-265V	50/60Hz	3414 lm	3000K	Included	180°	80	0,29 kg
CP02NW	○	SMD 2835 HONGLI	192	36W	180-265V	50/60Hz	3576 lm	4000K	Included	180°	80	0,29 kg
CP02CW	○	SMD 2835 HONGLI	192	36W	180-265V	50/60Hz	3605 lm	6000K	Included	180°	80	0,29 kg



PHOTOMETRIC DATA

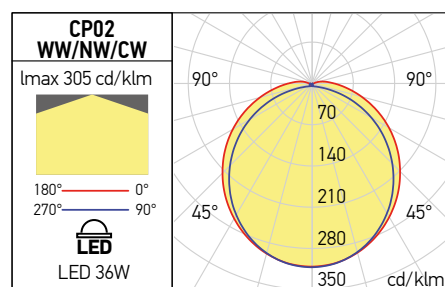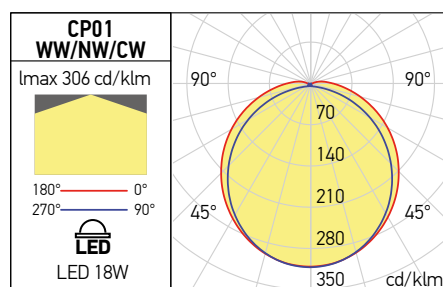

Standards: EN 60598-1:2015,
EN 60598-2-1:1989, EN 62493:2015,
EN 62471:2008, EN 62031:2008 + A2:2015,
EN 60529:1992 + A2:2013, EN 55015:2013,
EN 61000-3-2:2014,
EN 61000-3-3:2013, EN 61547:2009.