

XFILL 264 3M BLISTER

LED STRIPS
BENZI CU LED-URI
STRISCE A LED



EN

Flexible LED strips with SMD 2835 LEDs, 64 LED/m, with driver, power supply cable with switch on the wire and plug. Available in warm white, neutral white, cool white, red, green or blue colors. The strips come in 3m length, are sectionable every 125 mm in segments or groups of segments with 8 LEDs each. 3M double-sided adhesive tape mounting on the back allows easy fixing. Available in two versions, IP20 for interior mounting and IP65, waterproof and dustproof, for outdoor mounting. Both versions are delivered with IP20 drivers.


RO

Benzi flexibile cu LED-uri tip 2835 SMD, 64 LED/m, cu alimentator, cablu de alimentare cu întrerupător pe fir și ștecher. Sunt disponibile cu lumină monocromatică în alb cald, alb neutru, alb rece și în culorile roșu, verde și albastru. Benzile au lungime totală de 3m, sectionabile la fiecare 125 mm în grupuri de câte 8 LED-uri sau multiplu. Fixare rapidă, datorită benzii biadezive 3M (aplicată pe spatele benzii cu LED-uri). Disponibile în versiuni IP20 pentru montaj interior și IP65, protejate la praf și umiditate, pentru montaj în exterior. Ambele versiuni au incluse alimentatoarele IP20.

IT


Strisce flessibili a LED tipo 2835 SMD, 64 LED/m, con alimentatore, cavo di alimentazione con inreruttore a filo e spina. Sono disponibili con luce monocromatica, nelle tonalità bianco caldo, bianco neutro, bianco freddo e nelle colorazioni rosso, verde e blu. Lunghezza totale di 3m, sezionabile ogni 125 mm in gruppi di 8 LED o multipli. Fissaggio mediante biadesivo 3M (preapplicato sul retro della striscia). Versioni per interni con grado di protezione IP20 e versioni per esterni con grado di protezione IP65, protette da polvere e umidità. Entrambe le versioni hanno incluso alimentatori IP20.

FLB26420/3M (3m BLISTER)

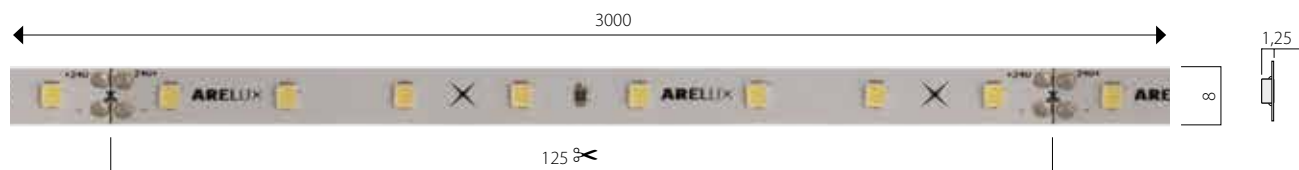

Code	LED Type	LED color temperature	Luminous flux (lm/3m)	Power (W/3m)	Power/meter (W/m)	Total lenght (m)/no. of LED	Number of LED/meter	LED view angle	Input voltage	Input frequency	Working temperature
FLB26420WW/3M	SMD 2835 EPISTAR	3000K	2220 lm/3m	18W	6W/m	3m / 192 LED	64 LED/m	>115°	100-240V	50/60Hz	-20 ÷ +60 °C
FLB26420NW/3M	SMD 2835 EPISTAR	4000K	2310 lm/3m	18W	6W/m	3m / 192 LED	64 LED/m	>115°	100-240V	50/60Hz	-20 ÷ +60 °C
FLB26420CW/3M	SMD 2835 EPISTAR	6000K	2340 lm/3m	18W	6W/m	3m / 192 LED	64 LED/m	>115°	100-240V	50/60Hz	-20 ÷ +60 °C
FLB26420R/3M	SMD 2835 EPISTAR	RED	930 lm/3m	18W	6W/m	3m / 192 LED	64 LED/m	>115°	100-240V	50/60Hz	-20 ÷ +60 °C
FLB26420G/3M	SMD 2835 EPISTAR	GREEN	1440 lm/3m	18W	6W/m	3m / 192 LED	64 LED/m	>115°	100-240V	50/60Hz	-20 ÷ +60 °C
FLB26420B/3M	SMD 2835 EPISTAR	BLUE	840 lm/3m	18W	6W/m	3m / 192 LED	64 LED/m	>115°	100-240V	50/60Hz	-20 ÷ +60 °C

FLB26465/3M (3m BLISTER)

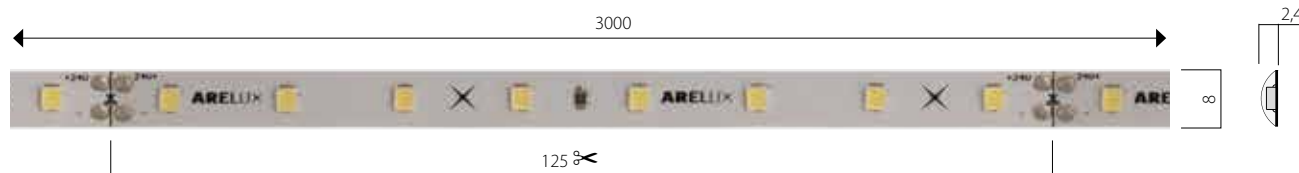

Code	LED Type	LED color temperature	Luminous flux (lm/3m)	Power (W/3m)	Power/meter (W/m)	Total lenght (m)/no. of LED	Number of LED/meter	LED view angle	Input voltage	Input frequency	Working temperature
FLB26465WW/3M	SMD 2835 EPISTAR	3000K	2160 lm/3m	18W	6W/m	3m / 192 LED	64 LED/m	>115°	100-240V	50/60Hz	-20 ÷ +60 °C
FLB26465NW/3M	SMD 2835 EPISTAR	4000K	2250 lm/3m	18W	6W/m	3m / 192 LED	64 LED/m	>115°	100-240V	50/60Hz	-20 ÷ +60 °C
FLB26465CW/3M	SMD 2835 EPISTAR	6000K	2280 lm/3m	18W	6W/m	3m / 192 LED	64 LED/m	>115°	100-240V	50/60Hz	-20 ÷ +60 °C



Standards: EN 60598-1:2015, EN 60598-2-20: 2010, EN 62493:2015, EN 62471:2008, EN 62031:2008 + A2:2015, EN 60529:1992 + A2:2013, EN 55015:2013, EN 61000-3-2:2014, EN 61000-3-3:2013, EN 61547:2009.