

# XFILL 560 RGB 5M BAG

LED STRIPS  
BENZI CU LED-URI  
STRISCE A LED



EN

Flexible LED strips with 5050 RGB SMD 3:1 FULL COLOR LEDs type. Power supply voltage 24V DC. The strips come in 5m length, are sectionable every 100 mm in segments or groups of segments with 6 LEDs each. 3M double-sided adhesive tape mounting on the back allows easy fixing. Available in two versions, IP20 for interior mounting and IP65 for outdoor mounting.


RO

Serie de benzi flexibile cu LED-uri tip 5050 RGB SMD 3:1 FULL COLOR. Tensiune de alimentare 24V DC. Lungime totală 5m, secționabilă la fiecare 100 mm în grupuri de câte 6 LED-uri sau multiplu. Fixare rapidă, datorită benzii biadezive 3M (aplicată pe spatele benzii cu LED-uri). Disponibil în versiuni IP20 pentru montaj interior și IP65, pentru montaj în exterior.

IT


Serie di strisce flessibili a LED tipo 5050 RGB SMD 3:1 FULL COLOR. Tensione di alimentazione 24V DC. Lunghezza totale di 5m, sezionabile ogni 100 mm in gruppi di 6 LED o multipli. Fissaggio mediante biadesivo 3M (preapplicato sul retro della striscia). Versioni per interni con grado di protezione IP20 e versioni per esterni con grado di protezione IP65.

## FL56020RGB/5M (5m BAG)

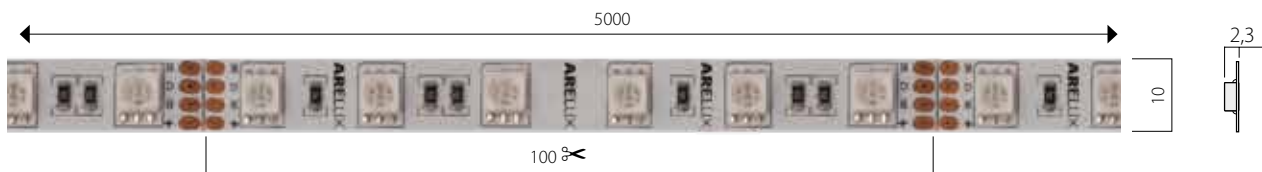

Code	LED Type	LED color temperature	Power (W/5m)	Power/meter (W/m)	Total length (m)/no. of LED	Number of LED/meter	LED view angle	Input voltage	Working temperature
<b>FL56020RGB/5 M</b>	SMD 5050 RGB EPISTAR	RGB	72W	14,4W/m	5m / 300 LED	60 LED/m	>115°	24V DC	-20 ÷ +60 °C

## FL56064RGB/5M (5m BAG)

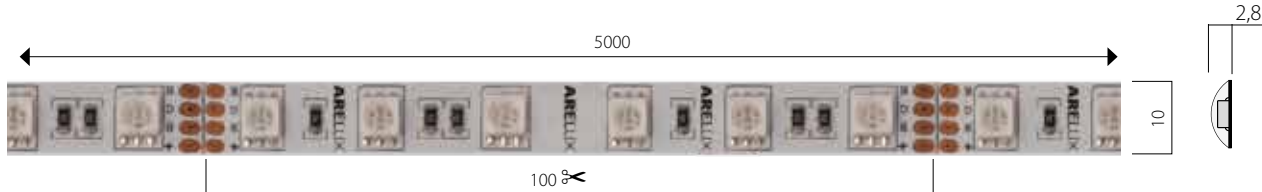

Code	LED Type	LED color temperature	Power (W/5m)	Power/meter (W/m)	Total length (m)/no. of LED	Number of LED/meter	LED view angle	Input voltage	Working temperature
<b>FL56065RGB/5M</b>	SMD 5050 RGB EPISTAR	RGB	72W	14,4W/m	5m / 300 LED	60 LED/m	>115°	24V DC	-20 ÷ +60 °C



Standards: EN 60598-1:2015, EN 60598-2-20:2010, EN 62493:2015, EN 62471:2008, EN 62031:2008 + A2:2015, EN 60529:1992 + A2:2013, EN 55015:2013, EN 61000-3-2:2014, EN 61000-3-3:2013, EN 61547:2009.