



Clamping Adapter

KKAT 300

EAN Code: 4013339815708
Smallest packaging unit: 10 pcs.



the photorealistic images are to be considered as reference images

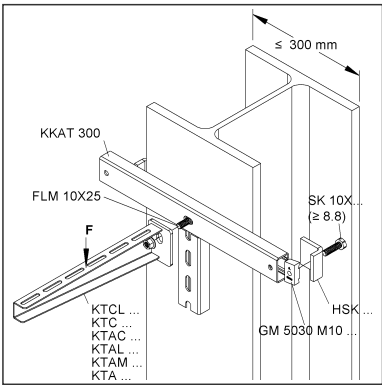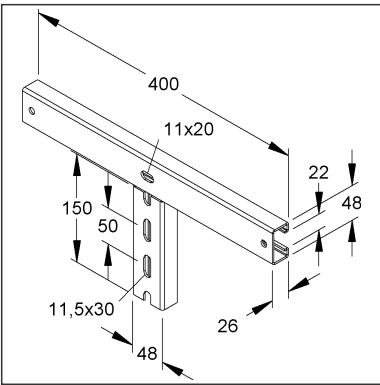

Article Description

Clamping adapter, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Incl. accessories

1 FLM 10X25 F

Excl. Accessories

exclusive bolting

Please order the necessary fastening accessories separately:
2 pieces GMZ M10 F, 2 pieces SK 10 (≥ 8.8) and 2 pieces HSK...

Additional Price Information

Article group

N13

quantity unit

pcs.

Technical Datasheet

Supporting structure

KKAT 300

the photorealistic images are to be considered as reference images

Weight

Weight per quantity unit	1,408 kg / pcs.
Weight in kg per 100	141 kg / 100pcs.

Physical Article Dimensions

Height	198.00 mm
Width	400 mm
Depth/length	26.00 mm

Packing Dimension

10 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	480 mm	Width	280 mm	Height	140.00 mm
Gross weight	15 kg	Volume	0,019 m³		
Min. quantity	10.00 pcs.	Max. Quantity	10.00 pcs.		

300 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	464 kg	Volume	0,960 m³		
Min. Quantity	300.00 pcs.	Max. Quantity	300.00 pcs.		

Tender Text

Clamping adapter, for 90° bracket arrangement on T-supports with a flange width \leq 300 mm, including fastening accessories for mounting the bracket on the clamping adapter, required clamping accessories on T-supports, such as 4 x GMZ M10 F, 2 x SK 10x... (\geq 8.8) and 2 x HSK..., please order separately In general, the brackets must first be attached to the adapter! The clamp fastening should be symmetrical and the screws as close as possible to the flange. The load capacity data of the outriggers used apply. In the case of the clamp adapters, these load capacity specifications only apply if the surfaces of the T-supports and profile clamps in the clamping area are made of steel or galvanised steel. If the building substrate is painted in the case of a clamp connection, this must be removed, otherwise the load-bearing capacity is not given or guaranteed. Danger of slipping! If steel supports are provided with a fire protection coating, this must not be removed without consultation and written approval of the client or the site management. In any case, the introduction of loads into the building must be agreed with the construction planning or site management.

Used for : suspended and wall brackets KTCL..., KTAC..., KTAL..., KTAFL... KTAM..., KTA...

Dimensions (approx. dimensions)

Height H : 198 mm

Width W : 400 mm

Load capacity F at L/2 of the bracket : \leq 1.5 kN

Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461 Flange thickness of the bracket in mm : _____

NIEDAX Model No. : KKAT 300

EP Material _____ EP Wage _____

Unit price/piece

Technical Datasheet

Supporting structure

KKAT 300

the photorealistic images are to be considered as reference images

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Federal State of Origin	RP
Customs tariff number	73089059