




Adapter

KSWAES 400.200 F

EAN Code: 4013339947003

Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

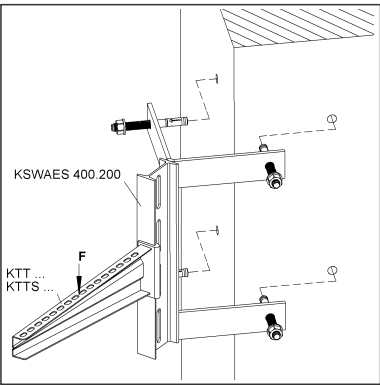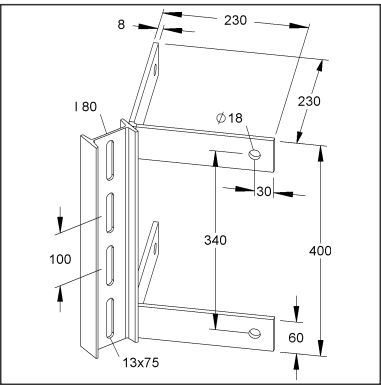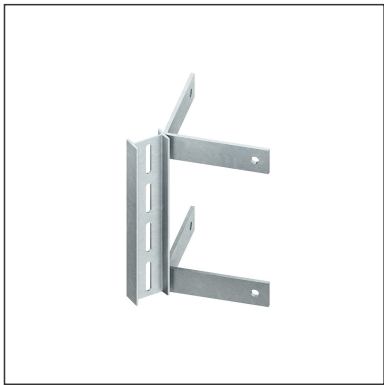

Article Description

Adapter 45°, steel, hot dip galvanised DIN EN ISO 1461

Excl. Accessories

exclusive bolting

Please order the necessary fastening accessories separately:
4 pcs. dowels / anchor bolts (taking into account the current dowel approvals in coordination with the site management).

Additional Price Information

Article group

N13

quantity unit

pcs.

Weight

Weight per quantity unit

6,136 kg / pcs.

Weight in kg per 100

614 kg / 100pcs.

Technical Datasheet

Supporting structure

KSWAES 400.200 F

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	400 mm
Width	243 mm
Depth/length	325 mm

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	325 mm	Width	243 mm	Height	400 mm
Gross weight	6,14 kg	Volume	0,032 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

Adapter, for 45° bracket arrangement on concrete supports, required fastening accessories on concrete supports, such as 4 x dowels/through anchors (taking into account the current dowel approvals in coordination with the site management), please order separately. For the 45° adapters, the length of the required brackets depends on the local conditions and the fittings to be used. The load capacity data of the jibs used apply.

Used for : bracket KTT.., KTTS...

Dimensions (approx. dimensions)

Height H : 400 mm

Side lengths : 230 mm

Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : KSWAES 400.200 F

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059