


Screw Anchor

Approval no.: ETA 15/0784, with large flat round head and torx drive T30

NSA 7.5X40/FKG-T30 V

EAN Code: 4013339153923
Smallest packaging unit: 100 pcs.

the photorealistic images are to be considered as reference images

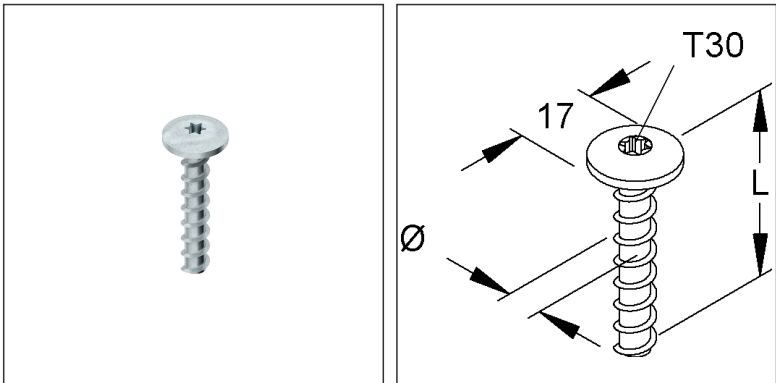

Article Description

Screw anchor, flat round head, drill-Ø 6 mm, length 40 mm, steel, electro galvanised according to DIN EN ISO 2081/4042, blue pass

Additional Price Information

Article group	N19
quantity unit	pcs.

Weight

Weight per quantity unit	14 g / pcs.
Weight in kg per 100	1,38 kg / 100pcs.

Technical Datasheet

Screws and nuts

NSA 7.5X40/FKG-T30 V

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	
Width	
Depth/length	

Packing Dimension

100 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	200.00 mm	Width	100.00 mm	Height	180.00 mm
Gross weight	1,38 kg	Volume	0,004 m³		
Min. quantity	100.00 pcs.	Max. Quantity	100.00 pcs.		

1000 pieces = 1 covering box					
Lenght	280 mm	Width	200.00 mm	Height	240 mm
Gross weight	14 kg	Volume	0,013 m³		
Min. Quantity	1.000.00 pcs.	Max. Quantity	1.000.00 pcs.		

48000 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	679 kg	Volume	0,960 m³		
Min. Quantity	48.000.00 pcs.	Max. Quantity	48.000.00 pcs.		

Tender Text

Screw anchor with large flat round head and Torx drive T30. For use in functional maintenance or for suspended ceilings with fire protection requirements (MLAR 2/2015), please observe additional regulations!

Application: The number and arrangement of the screw anchors must be taken from the implementation planning or the structural analysis and must be observed.

Installation and assembly according to European Technical Assessment ETA-15/0784 or assembly instructions in cracked and non-cracked concrete C20/25 to C50/60.

For dimensioning, the entire approval notice ETA-15/0784 must be observed. For use in masonry, see general type approval ETA-20/0132.

For sand-lime brick KS, perforated sand-lime brick KSL and solid brick MZ, a fire protection report for functional integrity is available. Use in dry interior rooms. Setting of the screw anchor with tangential impact screwdriver or by hand.

Used for : C-profiles ≥ 18 mm slot width

Technical data

Ø : 7.5 mm

Length L : 40 mm

Head-Ø : 17 mm

Nominal drill Ø : 6 mm

Clamping range t fix : 5 mm

Recommended torque : 20 Nm

Torx drive : T30

Material : steel, galvanised according to DIN EN ISO 19598/4042, blue passivated

Approval no. : ETA-15/0784

NIEDAX Model no. : NSA 7.5X40/FKG-T30 V

EP Material_____ EP Wage_____

Unit price/piece

Technical Datasheet

Screws and nuts

NSA 7.5X40/FKG-T30 V

the photorealistic images are to be considered as reference images

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73181499