



Barrier Strip, heavy

with system perforation

RW 110-2.0 S

EAN Code: 4013339180141
 Smallest packaging unit:3 m
 quantity unit:m M

the photorealistic images are to be considered as reference images

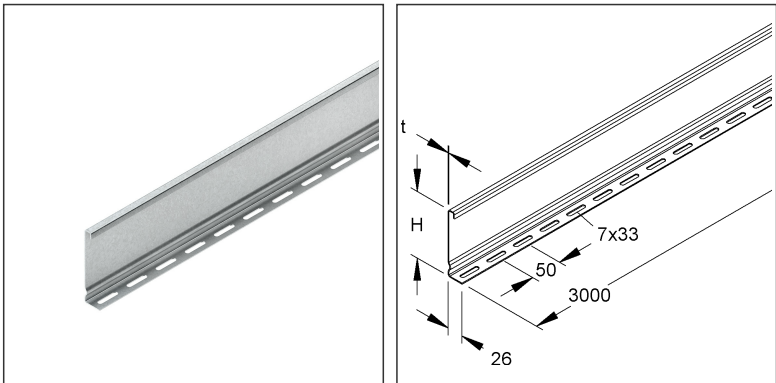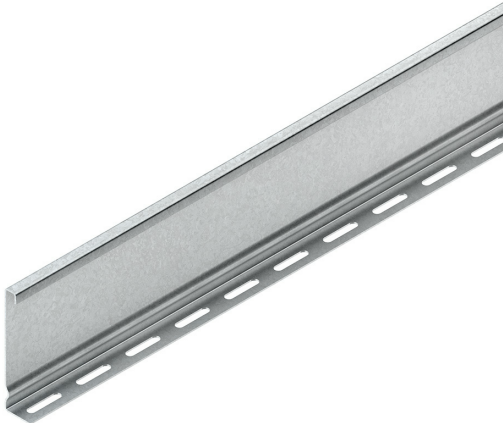

Article Description

Barrier strip, 108x2998 mm, t=2,0 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories

Incl. accessories

3 meter = 1 piece		✓ lowest delivery unit	✓ preferred delivery unit
Model No.	Description	quantity	
FLM 6X12	Mushroom-head bolt M6, similar DIN 603, length 12 mm, steel, electro galvanised according to DIN EN ISO 2081/4042, blue pass	4 pcs.	
600 meter = 1 rack		- lowest delivery unit	- preferred delivery unit
Model No.	Description	quantity	
FLM 6X12	Mushroom-head bolt M6, similar DIN 603, length 12 mm, steel, electro galvanised according to DIN EN ISO 2081/4042, blue pass	800 pcs.	

Technical Datasheet

Cable Tray System

RW 110-2.0 S

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	2,248 kg/ m
Weight in kg per 100	225 kg/ 100m

Physical Article Dimensions

Height	108.00 mm
Width	26.00 mm
Depth/length	2998 mm

Packing Dimension

3 meters = 1 piece		✔ VP1-smallest packaging unit (PU) ✔ VP1-preferred PU			
Lenght	2998 mm	Width	26.00 mm	Height	108.00 mm
Gross weight	6,74 kg	Volume	0,008 m³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		
600 meters = 1 rack					
Lenght	2998 mm	Width	850 mm	Height	670 mm
Gross weight	1435 kg	Volume	1,707 m³		
Min. Quantity	600.00 m	Max. Quantity	600.00 m		

Tender Text

Barrier strip, heavy, profiled, with system perforation in the base flange and additional Elbow to protect cables during cable pulling, for walkable cable trays, for stepless division of the tray width and for separating cables and lines with different voltages and functions, including proportionate fixing accessories.

Minimum number of barrier strips to support the walkable cover:

Cover width 100 mm = 0 piece

Cover width 200 mm = 0 piece

Cover width 300 mm = 1 piece for a max. compartment size of 200 mm

Cover width 400 mm = 1 piece for a max. compartment size of 200 mm

Cover width 500 mm = 2 piece for a max. compartment size of 200 mm

Cover width 600 mm = 2 piece for a max. compartment size of 200 mm

Equipotential bonding is achieved by screwing to the cable tray.

Used for : walkable cable trays

Dimensions (approx. dimensions)

Height H : 108 mm

Material thickness t : 2.0 mm

Delivery length L : 3000 mm

Material : Steel, pre-galvanised according to DIN EN 10346

NIEDAX Model no. : RW 110-2.0 S

EP Material_____ EP Wage_____

Unit price/metre

Technical Datasheet

Cable Tray System

RW 110-2.0 S

the photorealistic images are to be considered as reference images

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059