
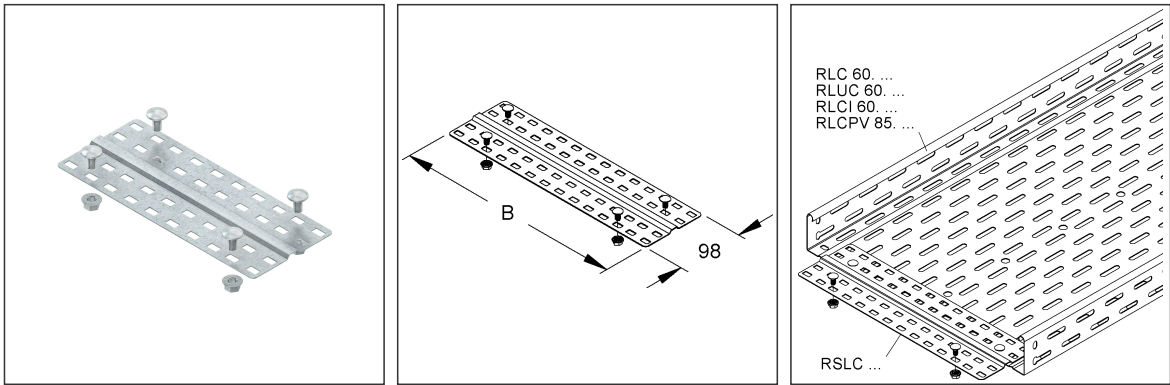


Joint Bar

RSLC 300 F

EAN Code: 4013339919345
 Smallest packaging unit:10 pcs.

the photorealistic images are to be considered as reference images

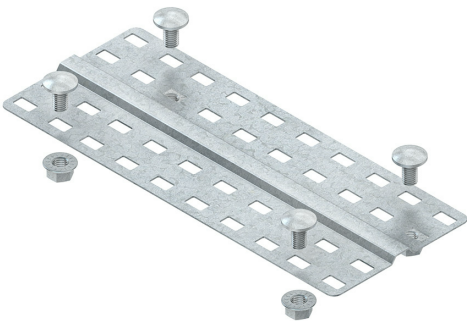

Article Description

Joint bar, width 239 mm, for bottom stabilisation, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Incl. accessories

4 FLM 6x12 F

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	213 g / pcs.
Weight in kg per 100	21 kg / 100pcs.

Technical Datasheet

Cable Tray System

RSLC 300 F

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	5.00 mm
Width	239 mm
Depth/length	98.00 mm

Packing Dimension

10 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	360 mm	Width	120.00 mm	Height	55.00 mm
Gross weight	2,21 kg	Volume	0,002 m³		
Min. quantity	10.00 pcs.	Max. Quantity	10.00 pcs.		

Tender Text

Joint bar, for cable trays with floor corrugations, with continuous fixing perforation, required for floor stabilisation of cable trays at joints, including hot-dip galvanised proportionate fixing accessories. For use in functional integrity maintenance or for suspended ceilings with fire protection requirements (sample cable system guideline MLAR 2/2015) please observe additional regulations!

for functional integrity maintenance : RLC 60... F OV in connection with connector RVC 60/2 F

Requirement : 1 piece per joint

Dimensions (approx. dimensions)

Width W : 239 mm

Material : steel, hot-dip galvanised according to DIN EN ISO 1461

NIEDAX Model No. : RSLC 300 F

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059