


Cable Trunking

with perforated bottom, incl. cover

LLK 100.100

EAN Code: 4013339789757  
Smallest packaging unit: 4 x 2 m  
quantity unit: m M

the photorealistic images are to be considered as reference images

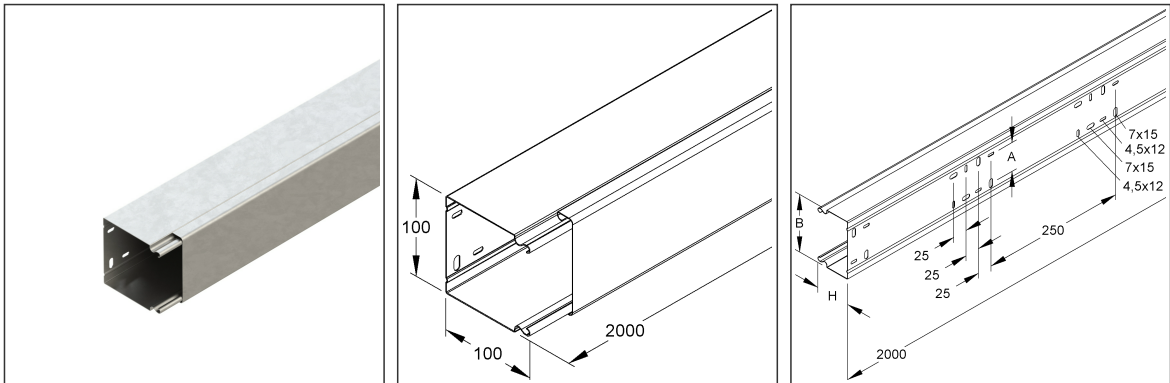

Article Description

Cable protection duct with cover, 100x100x2000 mm, steel, pre-galvanised according to DIN EN 10346

Additional Price Information

|               |     |
|---------------|-----|
| Article group | N16 |
| quantity unit | m   |

Weight

|                          |               |
|--------------------------|---------------|
| Weight per quantity unit | 3,196 kg / m  |
| Weight in kg per 100     | 320 kg / 100m |

Physical Article Dimensions

|              |           |
|--------------|-----------|
| Height       | 100.00 mm |
| Width        | 100.75 mm |
| Depth/length | 2000 mm   |

# Technical Datasheet

## Cable protection duct

LLK 100.100

the photorealistic images are to be considered as reference images

### Packing Dimension

|                     |         |                                     |          |                    |           |
|---------------------|---------|-------------------------------------|----------|--------------------|-----------|
| <b>8 meters = 1</b> |         | ✓ VP1-smallest packaging unit ( PU) |          | ✓ VP1-preferred PU |           |
| Lenght              | 2020 mm | Width                               | 225 mm   | Height             | 130.00 mm |
| Gross weight        | 27 kg   | Volume                              | 0,059 m³ |                    |           |
| Min. quantity       | 8.00 m  | Max. Quantity                       | 8.00 m   |                    |           |

|                            |          |               |          |        |         |
|----------------------------|----------|---------------|----------|--------|---------|
| <b>192 meters = 1 rack</b> |          |               |          |        |         |
| Lenght                     | 2000 mm  | Width         | 1162 mm  | Height | 1120 mm |
| Gross weight               | 734 kg   | Volume        | 2,603 m³ |        |         |
| Min. Quantity              | 192.00 m | Max. Quantity | 192.00 m |        |         |

### Tender Text

Cable protection duct, with snap-on cover and double-row fastening holes in the duct bottom, the equipotential bonding of the covers is carried out automatically when the covers are snapped on, accessories for equipotential bonding, two splice plates LST... per joint, must be ordered separately.

VDE certified!

Dimensions (approx. dimensions)

Height H x width W : 100 x 100 mm

double row bottom perforation : 2x (7 x 15) and

2x (4.5 x 12) mm

Row distance : 50 mm

Bottom hole distance grid dimension : 250 mm

Delivery length L : 2000 mm

Usable cross section : 9582 mm²

Material : steel, pre-galvanized acc. to DIN EN 10346

NIEDAX model no. : LLK 100.100

EP material\_\_\_\_\_ EP wage\_\_\_\_\_

Unit price/meter

### Safety & Environment

|            |             |
|------------|-------------|
| REACH Date | 25.06.2025  |
| REACH Info | Conformable |
| RoHS Info  | Conformable |

### Origin & International Trade

|                       |          |
|-----------------------|----------|
| Country of origin     | DE       |
| Customs tariff number | 73089059 |

# Technical Datasheet

## Cable protection duct

LLK 100.100

the photorealistic images are to be considered as reference images

### Related items

#### Barrier strip

| Model No. | Description                                                                                                     |
|-----------|-----------------------------------------------------------------------------------------------------------------|
| LZTP 100  | Barrier profile holder with strain relief, channel depth 99 mm, steel, pre-galvanised according to DIN EN 10346 |
| TPS 90    | Barrier strip, height 11 mm, depth 90 mm, length 1996 mm, steel, pre-galvanised according to DIN EN 10346       |

#### Connector

| Model No. | Description                                                                                     |
|-----------|-------------------------------------------------------------------------------------------------|
| LST 100   | Splice plate with flat plug, for height 100 mm, steel, pre-galvanised according to DIN EN 10346 |