


Cable Trunking

with perforated bottom, incl. cover

LLK 60.100

EAN Code: 4013339509201
Smallest packaging unit: 4 x 2 m
quantity unit: m M

the photorealistic images are to be considered as reference images

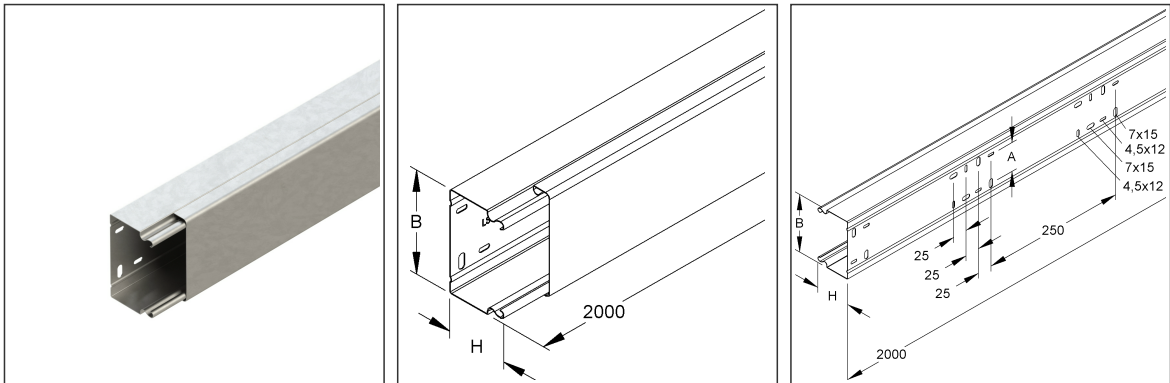

Article Description

Cable protection duct with cover, 60x100x2000 mm, steel, pre-galvanised according to DIN EN 10346

Additional Price Information

Article group	N16
quantity unit	m

Weight

Weight per quantity unit	2,352 kg / m
Weight in kg per 100	235 kg / 100m

Physical Article Dimensions

Height	100.00 mm
Width	60.75 mm
Depth/length	2000 mm

Technical Datasheet

Cable protection duct

LLK 60.100

the photorealistic images are to be considered as reference images

Packing Dimension

8 meters = 1		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	2020 mm	Width	230 mm	Height	85.00 mm
Gross weight	20 kg	Volume	0,039 m³		
Min. quantity	8.00 m	Max. Quantity	8.00 m		

320 meters = 1 rack					
Lenght	2000 mm	Width	1162 mm	Height	1120 mm
Gross weight	879 kg	Volume	2,603 m³		
Min. Quantity	320.00 m	Max. Quantity	320.00 m		

Tender Text

Cable protection duct, with snap-on cover and double-row fastening holes in the duct bottom, the equipotential bonding of the covers is carried out automatically when the covers are snapped on, accessories for equipotential bonding, two splice plates LST... per joint, must be ordered separately. Please observe additional regulations for use in functional maintenance!

VDE certified!

Dimensions (approx. dimensions)

Height H x width W : 60 x 100 mm

double row bottom perforation : 2x (7 x 15) and
2x (4.5 x 12) mm

Row distance : 50 mm

Bottom hole distance grid dimension : 250 mm

Delivery length L : 2000 mm

Usable cross section : 5582 mm²

Material : steel, pre-galvanized acc. to DIN EN 10346

NIEDAX model no. : LLK 60.100

EP material_____ EP wage_____

Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Technical Datasheet

Cable protection duct

LLK 60.100

the photorealistic images are to be considered as reference images

Related items

Barrier strip

Model No.	Description
LZTP 100	Barrier profile holder with strain relief, channel depth 99 mm, steel, pre-galvanised according to DIN EN 10346
TPS 50	Barrier strip, height 11 mm, depth 50 mm, length 1996 mm, steel, pre-galvanised according to DIN EN 10346

Connector

Model No.	Description
LST 60	Splice plate with flat plug, for height 60 mm, steel, pre-galvanised according to DIN EN 10346