


Cable Trunking

with perforated bottom, incl. cover

LLK 60.150

EAN Code: 4013339509300
Smallest packaging unit: 2 x 2 m
quantity unit: m M

the photorealistic images are to be considered as reference images

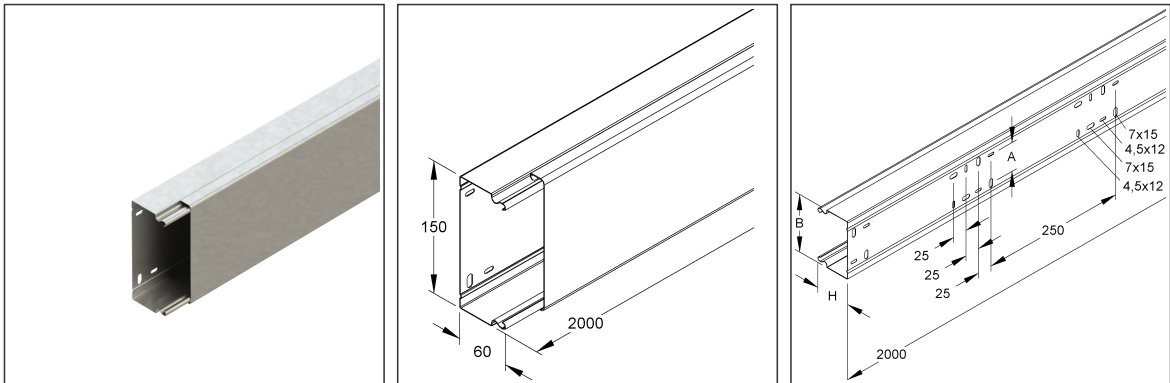

Article Description

Cable protection duct with cover, 60x150x2000 mm, steel, pre-galvanised according to DIN EN 10346

Additional Price Information

Article group	N16
quantity unit	m

Weight

Weight per quantity unit	3,515 kg / m
Weight in kg per 100	351 kg / 100m

Physical Article Dimensions

Height	150.00 mm
Width	60.90 mm
Depth/length	2000 mm

Technical Datasheet

Cable protection duct

LLK 60.150

the photorealistic images are to be considered as reference images

Packing Dimension

4 meters = 1		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	2020 mm	Width	200.00 mm	Height	85.00 mm
Gross weight	15 kg	Volume	0,034 m³		
Min. quantity	4.00 m	Max. Quantity	4.00 m		

220 meters = 1 rack					
Lenght	2000 mm	Width	1162 mm	Height	1120 mm
Gross weight	905 kg	Volume	2,603 m³		
Min. Quantity	220.00 m	Max. Quantity	220.00 m		

Tender Text

Cable protection duct, with snap-on cover and double-row fastening holes in the duct bottom, the equipotential bonding of the covers is carried out automatically when the covers are snapped on, accessories for equipotential bonding, two splice plates LST... per joint, must be ordered separately. Please observe additional regulations for use in functional maintenance!	
VDE certified!	
Dimensions (approx. dimensions)	
Height H x width W : 60 x 150 mm	
double row bottom perforation : 2x (7 x 15) and 2x (4.5 x 12) mm	
Row distance : 100 mm	
Bottom hole distance grid dimension : 250 mm	
Delivery length L : 2000 mm	
Usable cross section : 8582 mm²	
Material : steel, pre-galvanized acc. to DIN EN 10346	
NIEDAX model no. : LLK 60.150	
EP material_____ EP wage_____	
Unit price/meter	

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Technical Datasheet

Cable protection duct

LLK 60.150

the photorealistic images are to be considered as reference images

Related items

Barrier strip

Model No.	Description
LZTP 150	Barrier profile holder with strain relief, channel depth 149 mm, steel, pre-galvanised according to DIN EN 10346
TPS 50	Barrier strip, height 11 mm, depth 50 mm, length 1996 mm, steel, pre-galvanised according to DIN EN 10346

Connector

Model No.	Description
LST 60	Splice plate with flat plug, for height 60 mm, steel, pre-galvanised according to DIN EN 10346