




Cable Trunking

with perforated bottom, incl. cover

LLK 60.200

EAN Code: 4013339509409
Smallest packaging unit: 2 x 2 m
quantity unit: m M

the photorealistic images are to be considered as reference images

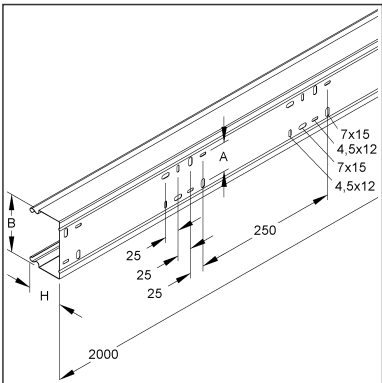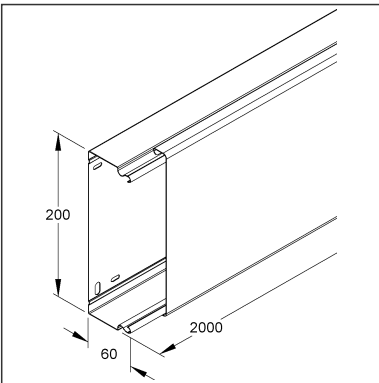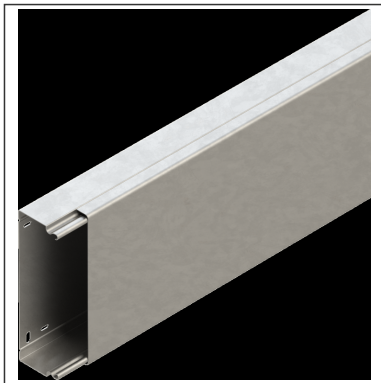

Article Description

Cable protection duct with cover, 60x200x2000 mm, steel, pre-galvanised according to DIN EN 10346

Additional Price Information

Article group	N16
quantity unit	m

Weight

Weight per quantity unit	4,222 kg / m
Weight in kg per 100	422 kg / 100m

Physical Article Dimensions

Height	200.00 mm
Width	60.90 mm
Depth/length	2000 mm

Technical Datasheet

Cable protection duct

LLK 60.200

the photorealistic images are to be considered as reference images

Packing Dimension

4 meters = 1		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	2020 mm	Width	220 mm	Height	90.00 mm
Gross weight	18 kg	Volume	0,040 m³		
Min. quantity	4.00 m	Max. Quantity	4.00 m		

176 meters = 1 rack					
Lenght	2000 mm	Width	1162 mm	Height	1120 mm
Gross weight	874 kg	Volume	2,603 m³		
Min. Quantity	176.00 m	Max. Quantity	176.00 m		

Tender Text

Cable protection duct, with snap-on cover and double-row fastening holes in the duct bottom, the equipotential bonding of the covers is carried out automatically when the covers are snapped on, accessories for equipotential bonding, two splice plates LST... per joint, must be ordered separately.

VDE certified!

Dimensions (approx. dimensions)

Height H x width W : 60 x 200 mm

double row bottom perforation : 2x (7 x 15) and

2x (4.5 x 12) mm

Row distance : 150 mm

Bottom hole distance grid dimension : 250 mm

Delivery length L : 2000 mm

Usable cross section : 11582 mm²

Material : steel, pre-galvanized acc. to DIN EN 10346

NIEDAX model no. : LLK 60.200

EP material_____ EP wage_____

Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Technical Datasheet

Cable protection duct

LLK 60.200

the photorealistic images are to be considered as reference images

Related items

Barrier strip

Model No.	Description
LZTP 200	Barrier profile holder with strain relief, channel depth 199 mm, steel, pre-galvanised according to DIN EN 10346
TPS 50	Barrier strip, height 11 mm, depth 50 mm, length 1996 mm, steel, pre-galvanised according to DIN EN 10346

Connector

Model No.	Description
LST 60	Splice plate with flat plug, for height 60 mm, steel, pre-galvanised according to DIN EN 10346