


Cable Trunking

with perforated bottom, incl. cover

LLK 80.080

EAN Code: 4013339789702
Smallest packaging unit: 4 x 2 m
quantity unit: m M

the photorealistic images are to be considered as reference images

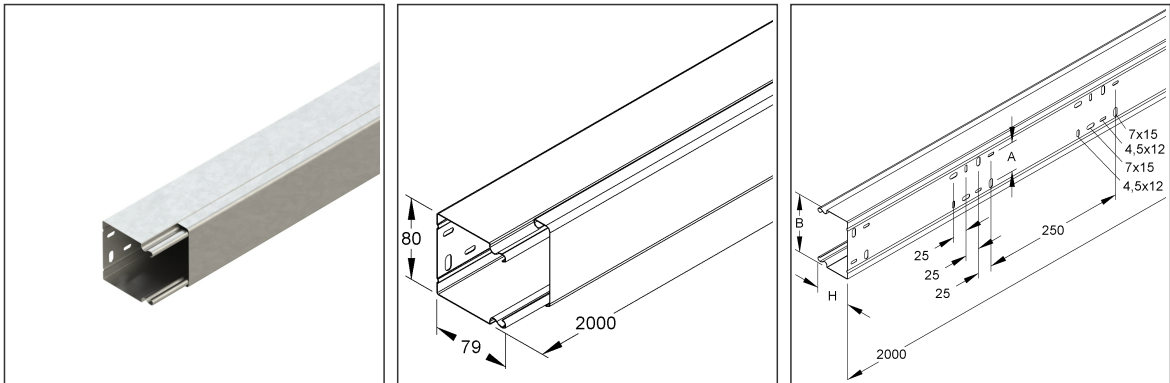

Article Description

Cable protection duct with cover, 80x80x2000 mm, steel, pre-galvanised according to DIN EN 10346

Additional Price Information

Article group	N16
quantity unit	m

Weight

Weight per quantity unit	2,340 kg / m
Weight in kg per 100	234 kg / 100m

Physical Article Dimensions

Height	80.00 mm
Width	79.75 mm
Depth/length	2000 mm

Technical Datasheet

Cable protection duct

LLK 80.080

the photorealistic images are to be considered as reference images

Packing Dimension

8 meters = 1		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	2020 mm	Width	190.00 mm	Height	105.00 mm
Gross weight	19 kg	Volume	0,040 m³		
Min. quantity	8.00 m	Max. Quantity	8.00 m		

320 meters = 1 rack					
Lenght	2000 mm	Width	1162 mm	Height	1120 mm
Gross weight	876 kg	Volume	2,603 m³		
Min. Quantity	320.00 m	Max. Quantity	320.00 m		

Tender Text

Cable protection duct, with snap-on cover and double-row fastening holes in the duct bottom, the equipotential bonding of the covers is carried out automatically when the covers are snapped on, accessories for equipotential bonding, two splice plates LST... per joint, must be ordered separately. VDE certified! Dimensions (approx. dimensions) Height H x width W : 80 x 80 mm double row bottom perforation : 2x (7 x 15) and 2x (4.5 x 12) mm Row distance : 30 mm Bottom hole distance grid dimension : 250 mm Delivery length L : 2000 mm Usable cross section : 5982 mm² Material : steel, pre-galvanized acc. to DIN EN 10346 NIEDAX model no. : LLK 80.080 EP material_____ EP wage_____ Unit price/meter	
--	--

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Related items

Barrier strip

Model No.	Description
TPH 80	Barrier profile holder, channel depth 78 mm, steel, pre-galvanised according to DIN EN 10346
TPS 70	Barrier strip, height 11 mm, depth 70 mm, length 1996 mm, steel, pre-galvanised according to DIN EN 10346

Technical Datasheet

Cable protection duct

LLK 80.080

the photorealistic images are to be considered as reference images

Related items

Connector

Model No.	Description
LST 80	Splice plate with flat plug, for height 80 mm, steel, pre-galvanised according to DIN EN 10346