


Cable Trunking

with bottom perforation, with cover

LLK 60.100 W

EAN Code: 4013339509706
Smallest packaging unit: 4 x 2 m
quantity unit: m M

the photorealistic images are to be considered as reference images

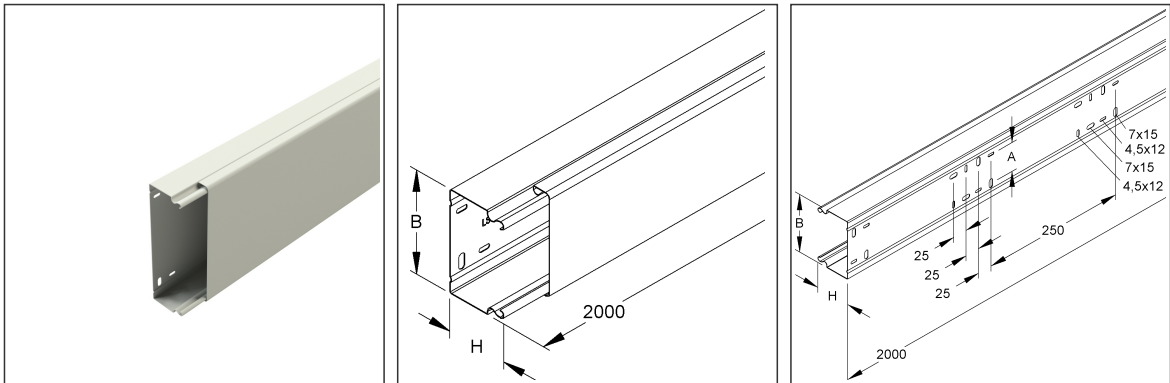

Article Description

Cable protection duct with cover, 60x100x2000 mm, steel, pre-galvanised according to DIN EN 10346, powder-coated, RAL9001

Additional Price Information

Article group	N16
quantity unit	m

Weight

Weight per quantity unit	2,446 kg / m
Weight in kg per 100	245 kg / 100m

Technical Datasheet

Cable protection duct

LLK 60.100 W

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	100.00 mm
Width	60.75 mm
Depth/length	2000 mm

Packing Dimension

8 meters = 1		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	2020 mm	Width	255 mm	Height	105.00 mm
Gross weight	20 kg	Volume	0,054 m³		
Min. quantity	8.00 m	Max. Quantity	8.00 m		

216 meters = 1 rack					
Lenght	2000 mm	Width	1162 mm	Height	1120 mm
Gross weight	651 kg	Volume	2,603 m³		
Min. Quantity	216.00 m	Max. Quantity	216.00 m		

Tender Text

Cable protection duct, with snap-on cover and double-row fastening holes in the duct bottom, visible surfaces coated in RAL colour electrostatically powder-coated in accordance to the manufacturer's catalogue, the equipotential bonding of the covers takes place automatically when snapped on, accessories for equipotential bonding, two LST... per joint, must be ordered separately. VDE certified! Please observe additional regulations for use in functional maintenance!

Dimensions (approx. dimensions)

Height H x width W : 60 x 100 mm

double row bottom perforation : 2x (7 x 15) and
2x (4.5 x 12) mm

Row distance : 50 mm

Bottom hole distance grid dimension : 250 mm

Delivery length L : 2000 mm

Usable cross section : 5582 mm²

Colour : cream white

RAL : 9001

Material : steel, pre-galvanised acc. to DIN EN 10346

NIEDAX model no. : LLK 60.100 W

EP material_____ EP wage_____

Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Technical Datasheet

Cable protection duct

LLK 60.100 W

the photorealistic images are to be considered as reference images

Related items

Barrier strip

Model No.	Description
LZTP 100	Barrier profile holder with strain relief, channel depth 99 mm, steel, pre-galvanised according to DIN EN 10346
TPS 50	Barrier strip, height 11 mm, depth 50 mm, length 1996 mm, steel, pre-galvanised according to DIN EN 10346

Connector

Model No.	Description
LST 60	Splice plate with flat plug, for height 60 mm, steel, pre-galvanised according to DIN EN 10346