




Cable Trunking

with bottom perforation, with cover

LLK 60.150 W

EAN Code: 4013339509805
Smallest packaging unit: 2 x 2 m
quantity unit: m M

the photorealistic images are to be considered as reference images

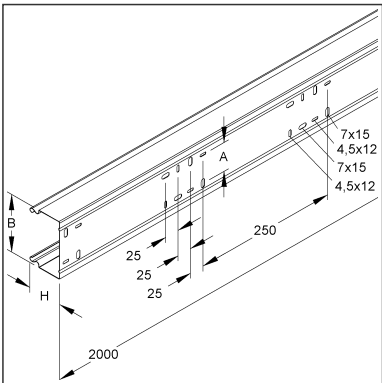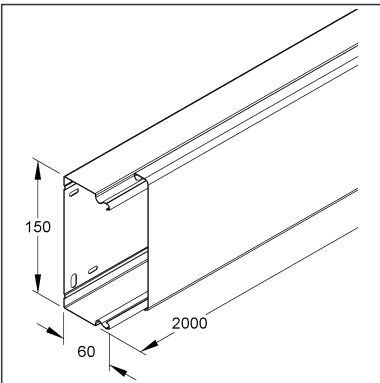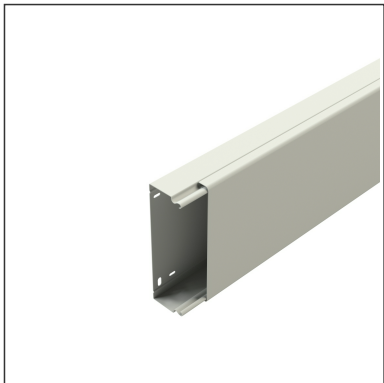

Article Description

Cable protection duct with cover, 60x150x2000 mm, steel, pre-galvanised according to DIN EN 10346, powder-coated, RAL9001

Additional Price Information

Article group	N16
quantity unit	m

Weight

Weight per quantity unit	3,656 kg / m
Weight in kg per 100	366 kg / 100m

Technical Datasheet

Cable protection duct

LLK 60.150 W

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	150.00 mm
Width	60.90 mm
Depth/length	2000 mm

Packing Dimension

4 meters = 1		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	2020 mm	Width	160.00 mm	Height	130.00 mm
Gross weight	15 kg	Volume	0,042 m³		
Min. quantity	4.00 m	Max. Quantity	4.00 m		

144 meters = 1 rack					
Lenght	2000 mm	Width	1162 mm	Height	1120 mm
Gross weight	652 kg	Volume	2,603 m³		
Min. Quantity	144.00 m	Max. Quantity	144.00 m		

Tender Text

Cable protection duct, with snap-on cover and double-row fastening holes in the duct bottom, visible surfaces coated in RAL colour electrostatically powder-coated in accordance with the manufacturer's catalogue, equipotential bonding of the covers takes place automatically when snapped on, accessories for equipotential bonding, two LST... per joint, must be ordered separately.

VDE certified!

Dimensions (approx. dimensions)

Height H x width W : 60 x 150 mm

double row bottom perforation : 2x (7 x 15) and
2x (4.5 x 12) mm

Row distance : 100 mm

Bottom hole distance grid dimension : 250 mm

Delivery length L : 2000 mm

Usable cross section : 8582 mm²

Colour : cream white

RAL : 9001

Material : steel, pre-galvanised acc. to DIN EN 10346

NIEDAX model no. : LLK 60.150 W

EP material_____ EP wage_____

unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Technical Datasheet

Cable protection duct

LLK 60.150 W

the photorealistic images are to be considered as reference images

Related items

Barrier strip

Model No.	Description
LZTP 150	Barrier profile holder with strain relief, channel depth 149 mm, steel, pre-galvanised according to DIN EN 10346
TPS 50	Barrier strip, height 11 mm, depth 50 mm, length 1996 mm, steel, pre-galvanised according to DIN EN 10346

Connector

Model No.	Description
LST 60	Splice plate with flat plug, for height 60 mm, steel, pre-galvanised according to DIN EN 10346