




Cable Trunking

with bottom perforation, with cover

LLK 80.080 W

EAN Code: 4013339789801
Smallest packaging unit: 4 x 2 m
quantity unit: m M

the photorealistic images are to be considered as reference images

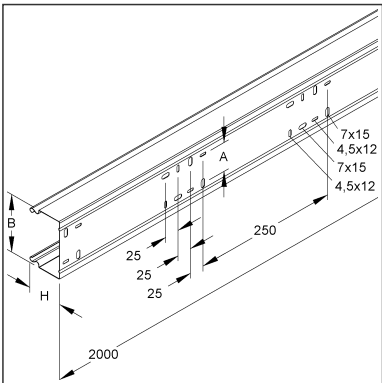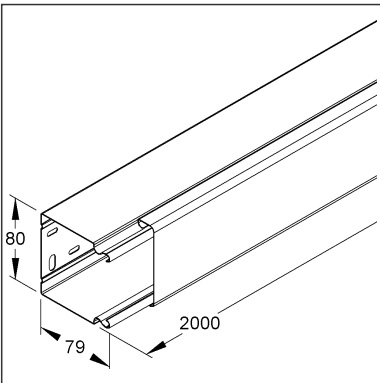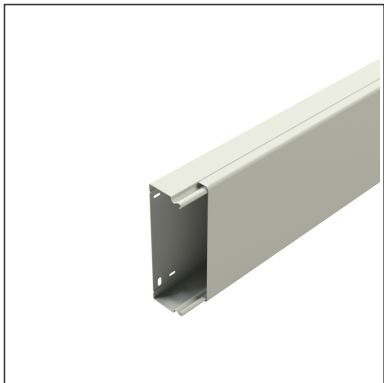

Article Description

Cable protection duct with cover, 80x80x2000 mm, steel, pre-galvanised according to DIN EN 10346, powder-coated, RAL9001

Additional Price Information

Article group	N16
quantity unit	m

Weight

Weight per quantity unit	2,433 kg / m
Weight in kg per 100	243 kg / 100m

Technical Datasheet

Cable protection duct

LLK 80.080 W

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	80.00 mm
Width	79.75 mm
Depth/length	2000 mm

Packing Dimension

8 meters = 1		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	2020 mm	Width	165.00 mm	Height	165.00 mm
Gross weight	20 kg	Volume	0,055 m³		
Min. quantity	8.00 m	Max. Quantity	8.00 m		

200 meters = 1 rack					
Lenght	2000 mm	Width	1162 mm	Height	1120 mm
Gross weight	608 kg	Volume	2,603 m ³		
Min. Quantity	200.00 m	Max. Quantity	200.00 m		

Tender Text

Cable protection duct, with snap-on cover and double-row fastening holes in the duct bottom, visible surfaces coated in RAL colour electrostatically powder-coated in accordance to the manufacturer's catalogue, the equipotential bonding of the covers takes place automatically when snapped on, accessories for equipotential bonding, two splice plates LST... per joint, must be ordered separately.

VDE certified!

Dimensions (approx. dimensions)

Height H x width W : 80 x 80 mm

double row bottom perforation : 2x (7 x 15) and
2x (4.5 x 12) mm

Row distance : 30 mm

Bottom hole distance grid dimension : 250 mm

Delivery length L : 2000 mm

Usable cross section : 5982 mm²

Colour : cream white

RAL : 9001

Material : steel, pre-galvanised acc. to DIN EN 10346

NIEDAX model no. : LLK 80.080 W

EP material_____ EP wage_____

Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Technical Datasheet

Cable protection duct

LLK 80.080 W

the photorealistic images are to be considered as reference images

Related items

Barrier strip

Model No.	Description
TPH 80	Barrier profile holder, channel depth 78 mm, steel, pre-galvanised according to DIN EN 10346
TPS 70	Barrier strip, height 11 mm, depth 70 mm, length 1996 mm, steel, pre-galvanised according to DIN EN 10346

Connector

Model No.	Description
LST 80	Splice plate with flat plug, for height 80 mm, steel, pre-galvanised according to DIN EN 10346