


Cable Trunking

without bottom perforation, with cover

LUK 40.040

EAN Code: 4013339508921
Smallest packaging unit: 12 x 2 m
quantity unit: m M

the photorealistic images are to be considered as reference images

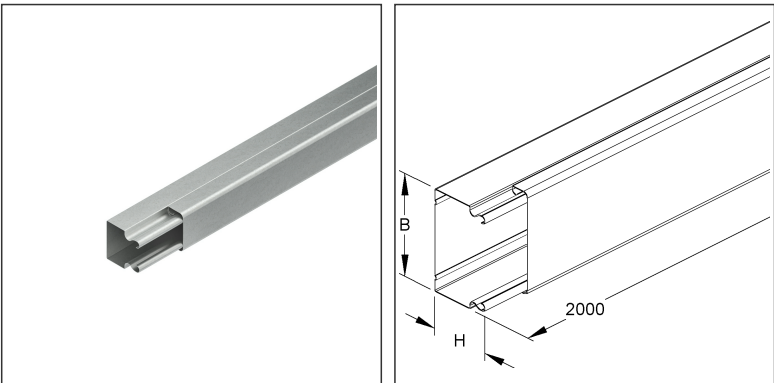

Article Description

Cable protection duct with cover, 40x40x2000 mm, steel, pre-galvanised according to DIN EN 10346

Additional Price Information

Article group	N16
quantity unit	m

Weight

Weight per quantity unit	956 g / m
Weight in kg per 100	96 kg / 100m

Physical Article Dimensions

Height	40.00 mm
Width	40.50 mm
Depth/length	2000 mm

Technical Datasheet

Cable protection duct

LUK 40.040

the photorealistic images are to be considered as reference images

Packing Dimension

24 meters = 1		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	2020 mm	Width	155.00 mm	Height	126.00 mm
Gross weight	24 kg	Volume	0,039 m³		
Min. quantity	24.00 m	Max. Quantity	24.00 m		

864 meters = 1 rack					
Lenght	2000 mm	Width	1162 mm	Height	1120 mm
Gross weight	948 kg	Volume	2,603 m³		
Min. Quantity	864.00 m	Max. Quantity	864.00 m		

Tender Text

Cable protection duct, unperforated, with snap-on cover, the equipotential bonding of the covers is carried out automatically when the covers are snapped on, accessories for equipotential bonding, two splice plates LST... per joint, must be ordered separately. VDE certified! Dimensions (approx. dimensions) Height H x width W : 40 x 40 mm Delivery length L : 2000 mm Usable cross section : 1182 mm² Material : steel, pre-galvanised acc. to DIN EN 10346 NIEDAX Model No. : LUK 40.040 EP Material_____ EP Wage_____ Unit price/meter	
---	--

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Related items

Connector

Model No.	Description
LST 40	Splice plate with flat plug, for height 40 mm, steel, pre-galvanised according to DIN EN 10346