


Cable Trunking

without bottom perforation, with cover

LUK 40.060 R

EAN Code: 4013339965151
Smallest packaging unit: 6 x 2 m
quantity unit: m M

the photorealistic images are to be considered as reference images

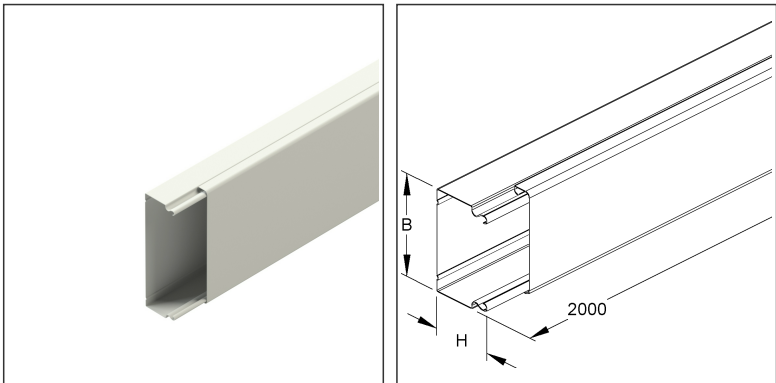

Article Description

Cable protection duct with cover, 40x60x2000 mm, steel, pre-galvanised according to DIN EN 10346, powder-coated, RAL9010

Additional Price Information

Article group	N16
quantity unit	m

Weight

Weight per quantity unit	1,383 kg / m
Weight in kg per 100	138 kg / 100m

Technical Datasheet

Cable protection duct

LUK 40.060 R

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	60.00 mm
Width	40.60 mm
Depth/length	2000 mm

Packing Dimension

12 meters = 1		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	2020 mm	Width	185.00 mm	Height	90.00 mm
Gross weight	17 kg	Volume	0,034 m³		
Min. quantity	12.00 m	Max. Quantity	12.00 m		

540 meters = 1 rack					
Lenght	2000 mm	Width	1162 mm	Height	1120 mm
Gross weight	872 kg	Volume	2,603 m³		
Min. Quantity	540.00 m	Max. Quantity	540.00 m		

Tender Text

Cable protection duct, unperforated, with snap-on cover, visible surfaces electrostatically powder-coated in RAL colour according to the manufacturer's catalogue, equipotential bonding of the covers takes place automatically when snapped on, accessories for equipotential bonding, two splice plates LST... per joint, must be ordered separately.

VDE certified!

Dimensions (approx. dimensions)

Height H x width W : 40 x 60 mm

Delivery length L : 2000 mm

Usable cross-section : 1982 mm²

Colour : pure white

RAL : 9010

Material : steel, pre-galvanised acc. to DIN EN 10346

NIEDAX Model No. : LUK 40.060 R

EP Material_____ EP Wage_____

Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Technical Datasheet

Cable protection duct

LUK 40.060 R

the photorealistic images are to be considered as reference images

Related items

Barrier strip

Model No.	Description
TPH 60	Barrier profile holder, channel depth 59 mm, steel, pre-galvanised according to DIN EN 10346
TPS 30	Barrier strip, height 11 mm, depth 30 mm, length 1996 mm, steel, pre-galvanised according to DIN EN 10346

Connector

Model No.	Description
LST 40	Splice plate with flat plug, for height 40 mm, steel, pre-galvanised according to DIN EN 10346