
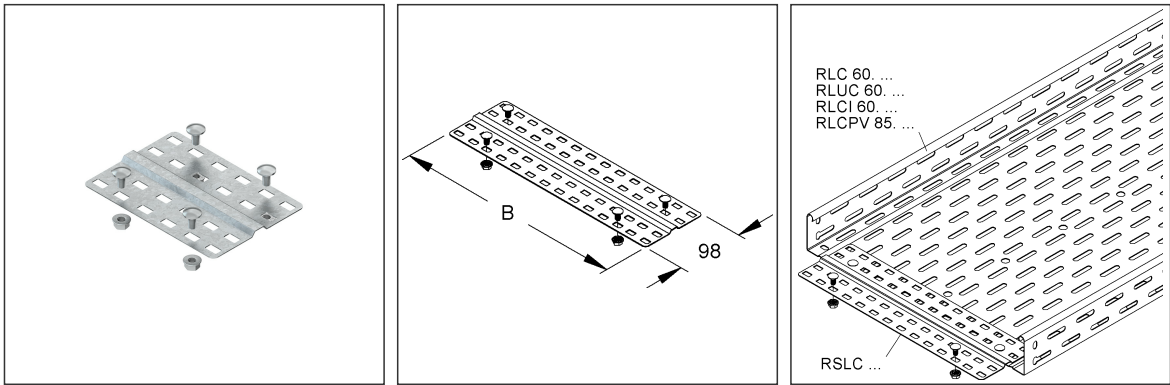


Joint Bar

RSLC 200 F

EAN Code: 4013339919321
Smallest packaging unit: 10 pcs.

the photorealistic images are to be considered as reference images

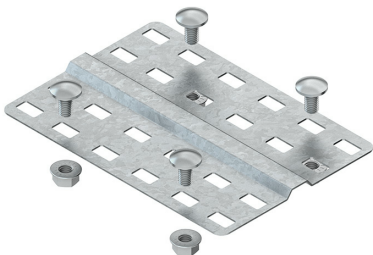

Article Description

Joint bar, width 139 mm, for bottom stabilisation, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Incl. accessories

4 FLM 6x12 F

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	137 g / pcs.
Weight in kg per 100	14 kg / 100pcs.

Technical Datasheet

Cable Tray System

RSLC 200 F

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	5.00 mm
Width	139.00 mm
Depth/length	98.00 mm

Packing Dimension

10 pieces = 1		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	154.00 mm	Width	138.00 mm	Height	71.00 mm
Gross weight	1,42 kg	Volume	0,002 m³		
Min. quantity	10.00 pcs.	Max. Quantity	10.00 pcs.		

1470 pieces = 1					
Lenght	750 mm	Width	750 mm	Height	730 mm
Gross weight	249 kg	Volume	0,411 m³		
Min. Quantity	1.470.00 pcs.	Max. Quantity	1.470.00 pcs.		

Tender Text

Joint bar, for cable trays with floor corrugations, with continuous fixing perforation, required for floor stabilisation of cable trays at joints, including hot-dip galvanised proportionate fixing accessories. For use in functional integrity maintenance or for suspended ceilings with fire protection requirements (sample cable system guideline MLAR 2/2015) please observe additional regulations!

for functional integrity maintenance : RLC 60... F OV in connection with connector RVC 60/2 F

Requirement : 1 piece per joint

Dimensions (approx. dimensions)

Width W : 139 mm

Material : steel, hot-dip galvanised according to DIN EN ISO 1461

NIEDAX Model No. : RSLC 200 F

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059