


LLK 26.030 R

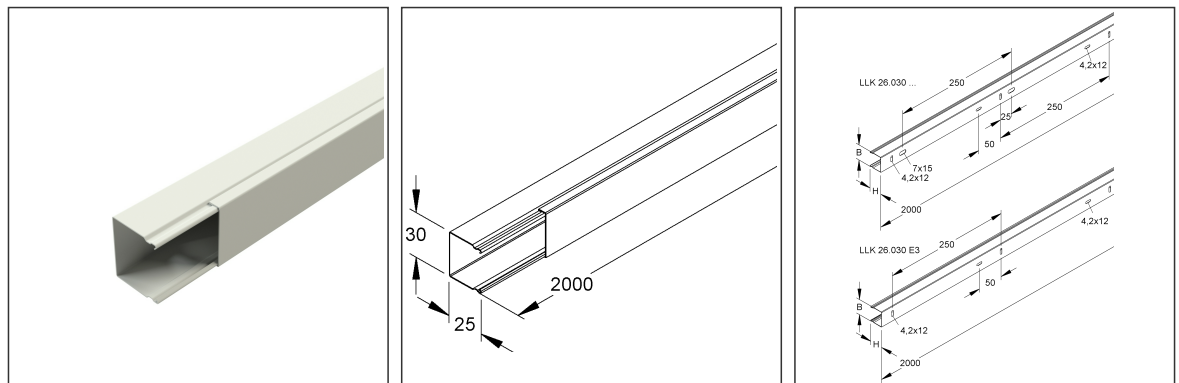

Weight per quantity unit	521 g/ m
Weight in kg per 100	52 kg/ 100m

Technical Datasheet

Cable protection duct

LLK 26.030 R

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	30.00 mm
Width	25.50 mm
Depth/length	2000 mm

Packing Dimension

24 meters = 1		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	2020 mm	Width	130.00 mm	Height	85.00 mm
Gross weight	13 kg	Volume	0,022 m³		
Min. quantity	24.00 m	Max. Quantity	24.00 m		

1680 meters = 1 rack					
Lenght	2000 mm	Width	1162 mm	Height	1120 mm
Gross weight	1006 kg	Volume	2,603 m³		
Min. Quantity	1.680.00 m	Max. Quantity	1.680.00 m		

Tender Text

Mini-cable protection duct, with snap-on cover and single-row fastening perforation in the duct bottom, visible surfaces coated electrostatically in RAL colour electrostatically powder-coated in accordance to the manufacturer's catalogue, the equipotential bonding of the covers takes place automatically when snapped on, accessories for equipotential bonding, one splice plate LST.../LSTA... per joint, must be ordered separately.

VDE certified! Please observe additional regulations for use in functional maintenance!

Dimensions (approx. dimensions)

Height H x width W : 26 x 30 mm

single row floor perforation : 4.2 x 12 mm

Floor hole distance grid dimension : 250 mm

Delivery length L : 2000 mm

Usable cross section : 730 mm²

Colour : pure white

RAL : 9010

Material : steel, pre-galvanised acc. to DIN EN 10346

NIEDAX model no. : LLK 26.030 R

EP material_____ EP wage_____

Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Technical Datasheet

Cable protection duct

LLK 26.030 R

the photorealistic images are to be considered as reference images

Related items

Connector

Model No.	Description
LST 26.030	Splice plate with flat plug, for height 26 mm, width 30 mm, brass
LSTA 26.030	Splice plate with flat plug, for height 26 mm, width 30 mm, brass