



Vertical Cable Ladder Cover

Complete set, unassembled

STVW 200 F

EAN Code: 4013339071999
 Smallest packaging unit:3 m
 quantity unit:m M

the photorealistic images are to be considered as reference images

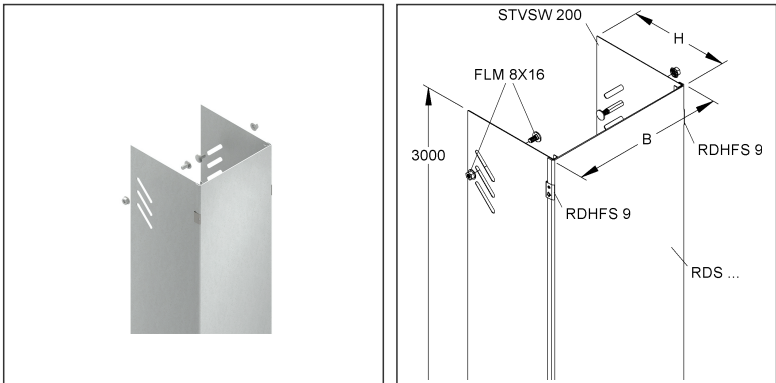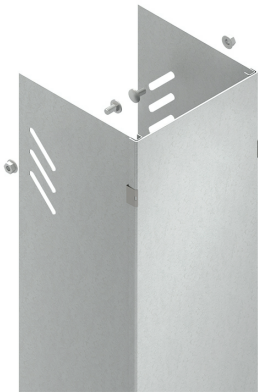

Article Description

Vertical cable ladder cover, 203x209x3000 mm, wall mounting, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Incl. accessories

3 meter = 1 piece		✓ lowest delivery unit	✓ preferred delivery unit
Model No.	Description	quantity	
FLM 8X16 F	Mushroom-head bolt M8, similar DIN 603, length 16 mm, steel, hot dip galvanised DIN EN ISO 1461	6 pcs.	

Additional Price Information

Article group	N13
quantity unit	m

Technical Datasheet

Vertical Cable Ladder System

STVW 200 F

the photorealistic images are to be considered as reference images

Weight

Weight per quantity unit	7,728 kg / m
Weight in kg per 100	773 kg / 100m

Physical Article Dimensions

Height	202.80 mm
Width	209 mm
Depth/length	3000 mm

Packing Dimension

3 meters = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	3000 mm	Width	209 mm	Height	203 mm
Gross weight	23 kg	Volume	0,127 m³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		

Tender Text

Vertical cable ladder cover, complete set, unassembled, for wall-mounted Vertical cable ladders, including hot-dip galvanised proportional fixing accessories. There is sufficient space under the cladding so that U-clamps for up to 3 cables can be easily mounted on the Vertical cable ladder. For transport reasons, the delivery is made as a kit! The side parts are mounted to the Vertical cable ladder on site with the accessories. After completion of the installation, the cover is snapped on with the cover retaining springs. Due to external influences, e.g. wind loads, outdoor use is only possible with additional securing (self-tapping screws, steel strap, etc.).

Set consists of:

2 side panels STVSW 200,

6 lid retaining springs RDHFS 9

1 lid RDS ...

Used for :

vertical cable ladders STL 60. ... with U-clamp B .../3

STM 60. ... with U-clamp BU .../3

Dimensions (approx. dimensions)

Height H outside : 203 mm

Width W outside : 209 mm

Delivery length L : 3000 mm

Material : Steel, hot-dip galvanised according to DIN EN ISO 1461

NIEDAX Model no. : STVW 200 F

EP Material_____ EP Wage_____

Unit price/metre

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet

Vertical Cable Ladder System

STVW 200 F

the photorealistic images are to be considered as reference images

Origin & International Trade	
Country of origin	DE
Customs tarif number	73089059