

Cover for T-Piece, antislip R10 acc. to DIN 51130



with pre-assembled turning lock fasteners and full-surface, heavy aluminium chequer plate support

RTSDVSRS 200

EAN Code: 4013339864126

Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

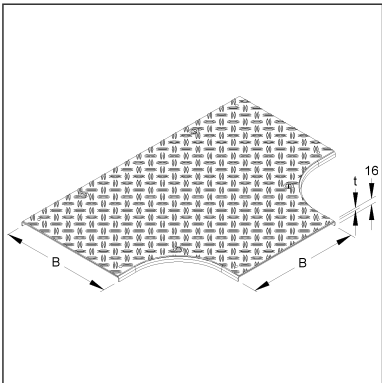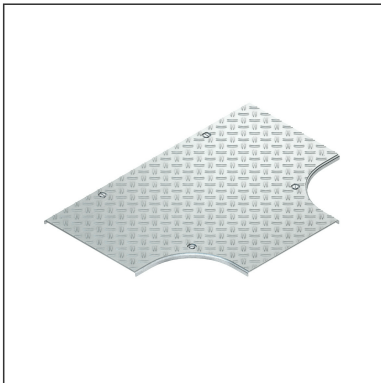

Article Description

Cover for T-piece for cable tray, width 205 mm, with turning bolt, steel, pre-galvanised according to DIN EN 10346

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	3,987 kg / pcs.
Weight in kg per 100	399 kg / 100pcs.

Technical Datasheet

Cable Tray System

RTSDVSRS 200

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	15.50 mm
Width	397.50 mm
Depth/length	588 mm

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	588 mm	Width	398 mm	Height	16.00 mm
Gross weight	3,99 kg	Volume	0,004 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

Cover antislip R10 in accordance with DIN EN 16165, heavy-duty version, with fully riveted heavy aluminium chequer plate and captive pre-mounted turning bolt locks, height-independent cover for the T-piece of the walkable cable trays. To support the walkable cover, please observe the minimum number of Barrier strips (see Barrier strip RTSKQ... AL, RTSQF... and RW...-...)! Other anti-slip linings available on request.

Used for : T-piece RTSS ...

Dimensions (approx. dimensions)

Width W (inside) : 205 mm

Material thickness t : 6 mm

The material thickness is composed of 2 mm steel sheet, 2.5 mm aluminium sheet support and 1.5 mm corrugation height.

Material : Steel, pre-galvanised according to DIN EN 10346

Aluminium, blank

NIEDAX Model no. : RTSDVSRS 200

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059