


Conduit-Thread Flange Clamp

FM-313T

EAN Code: 4013339745265

Smallest packaging unit: 100 pcs.

the photorealistic images are to be considered as reference images

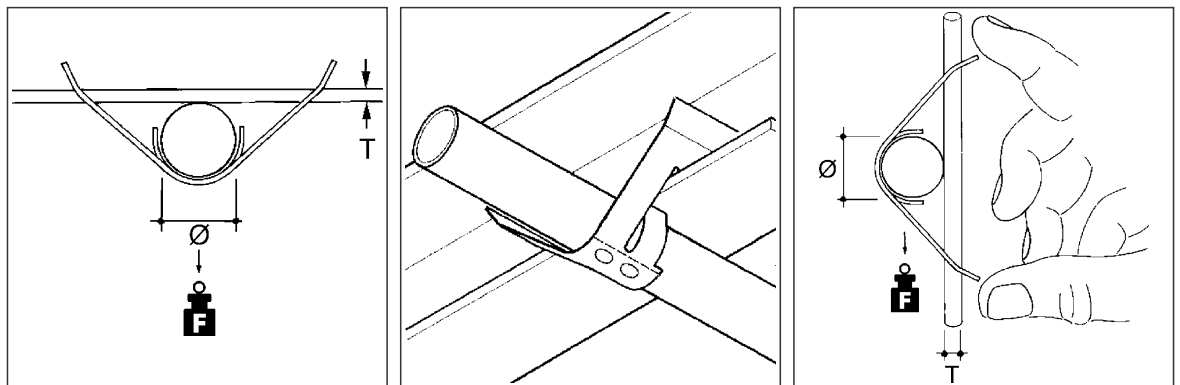

Article Description

E-KLIPS, conduit-thread flange clamp, t=3-13 mm, steel, mechanical zinc plated / passivated

Additional Price Information

Article group	N12
quantity unit	pcs.

Weight

Weight per quantity unit	18 g / pcs.
Weight in kg per 100	1,8 kg / 100pcs.

Packing Dimension

100 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	158.00 mm	Width	180.00 mm	Height	158.00 mm
Gross weight	1,8 kg	Volume	0,004 m³		
Min. quantity	100.00 pcs.	Max. Quantity	100.00 pcs.		

Tender Text

E-Klips, conduit thread flange clamp, for hooking onto a wide variety of support flanges. With a vertical thread diameter of M 6, M 8 or M 10, the maximum load capacity F is 0.1 kN.

Dimensions (approx. dimensions)

for flange thickness T : 3 - 13 mm

Technical Datasheet

E-clips

FM-313T

the photorealistic images are to be considered as reference images

Tender Text

flange thickness 3 - 5 mm : conduit-Ø 16 - 22,5 mm
flange thickness 6 - 9 mm : conduit-Ø 16 - 20 mm
flange thickness 9 - 13 mm : conduit-Ø 16 mm
permissible load capacity F : 0,45 kN
permissible vertical maximum load capacity F of M 6, M 8, M 10 : 0,1 kN
Material : Steel, mechanically galvanised/passivated acc. to DIN EN ISO 9227
NIEDAX Model-No. : FM-313T
EP Material_____ EP Wage_____
Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	GB
Customs tariff number	73269096