

Screw Distance Clamp

with female connection thread M6




SAS 47

EAN Code: 4013339734948

Smallest packaging unit: 20 pcs.



the photorealistic images are to be considered as reference images

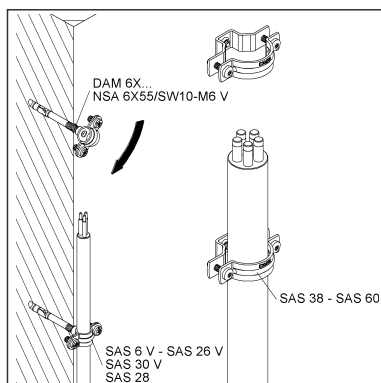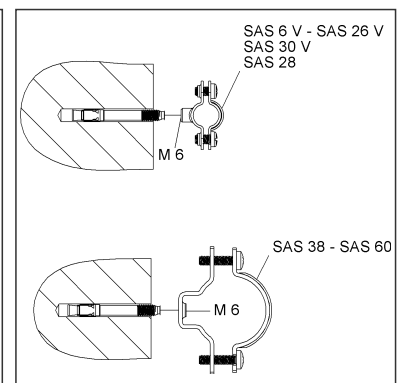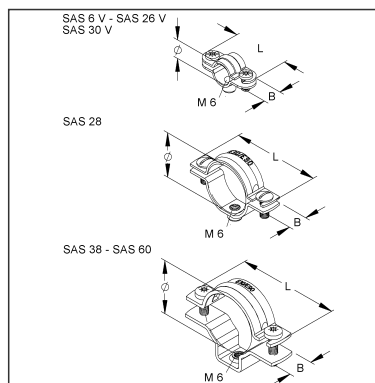

Article Description

Screw distance clamp, for cables-Ø 38-47 mm, steel, galvanised acc. to DIN EN ISO 2081, thick-film passivated

Technical Datasheet

Conduit and cable distance clamps

SAS 47

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N06
quantity unit	pcs.

Weight

Weight per quantity unit	61 g / pcs.
Weight in kg per 100	6,01 kg / 100pcs.

Physical Article Dimensions

Height	54.50 mm
Width	79.20 mm
Depth/length	16.00 mm

Packing Dimension

20 pieces = 1		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	192.00 mm	Width	138.00 mm	Height	71.00 mm
Gross weight	1,29 kg	Volume	0,002 m³		
Min. quantity	20.00 pcs.	Max. Quantity	20.00 pcs.		

200 pieces = 1 covering box					
Lenght	370 mm	Width	282 mm	Height	196.00 mm
Gross weight	13 kg	Volume	0,020 m³		
Min. Quantity	200.00 pcs.	Max. Quantity	200.00 pcs.		

6400 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	437 kg	Volume	0,960 m³		
Min. Quantity	6.400.00 pcs.	Max. Quantity	6.400.00 pcs.		

Tender Text

Conduit- and cable distance clamp, with M 6 internal thread, for screwing onto screw anchors up to 8 mm thread length, when installing on push-through anchors DAM 6X... or screw anchor NSA 6X55/SW10-M6, care must be taken to ensure that the connection thread of the push-through anchor does not protrude into the clamping area of the cable.

Please observe additional regulations for use in functional maintenance!

Used for: cables and electrical conduits according to DIN EN 61386-21

Dimensions (approx. dimensions)

Width W x length L : 16 x 79,7 mm

Internal connection thread : M 6

for cable clamping range-Ø : 38 - 47 mm

for pipe-Ø : 40 mm

Material : steel, electro-galvanised to DIN EN ISO 19598, thick-film passivated

Material screws : steel, electro-galvanised to DIN EN ISO 4042, thick-film passivated

Niedax Model No. : SAS 47

EP Material _____ EP Lohn _____

Technical Datasheet

Conduit and cable distance clamps

SAS 47

the photorealistic images are to be considered as reference images

Tender Text

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tarif number	73269098