



Strip Steel Distance Clamp

with dowel

253 D

EAN Code: 4013339152704
Smallest packaging unit: 25 pcs.

the photorealistic images are to be considered as reference images

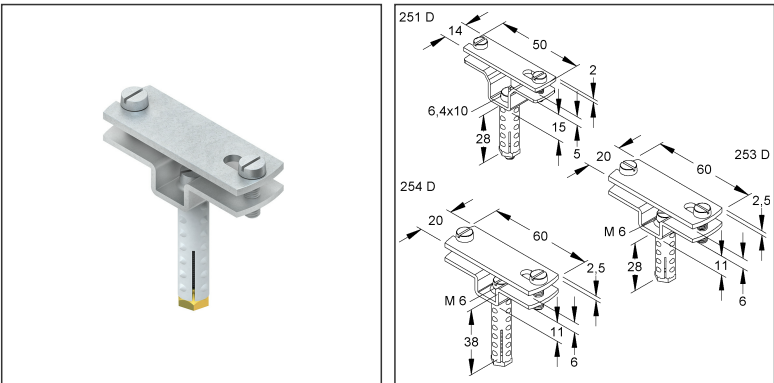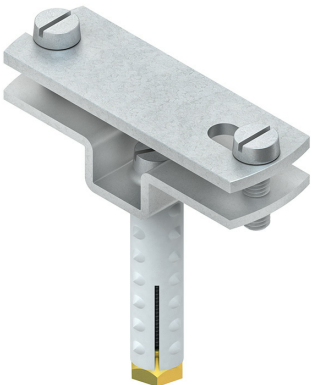

Article Description

Strip steel distance clamp, with dowel 28 mm, thread M6, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N14
quantity unit	pcs.

Weight

Weight per quantity unit	63 g / pcs.
Weight in kg per 100	6,21 kg / 100pcs.

Physical Article Dimensions

Height	54.00 mm
Width	60.00 mm
Depth/length	20.00 mm

Technical Datasheet

Earthing and Equipotential bonding rail

253 D

the photorealistic images are to be considered as reference images

Packing Dimension

25 pieces = 1		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	120.00 mm	Width	120.00 mm	Height	100.00 mm
Gross weight	1,6 kg	Volume	0,001 m³		
Min. quantity	25.00 pcs.	Max. Quantity	25.00 pcs.		

3625 pieces = 1					
Lenght	750 mm	Width	750 mm	Height	730 mm
Gross weight	272 kg	Volume	0,411 m³		
Min. Quantity	3.625.00 pcs.	Max. Quantity	3.625.00 pcs.		

Tender Text

Strip steel distance clamp with dowel, including cylinder head screws with slot acc. to DIN EN ISO 1207, with connection thread for screwing on, for laying steel strip.

Used for : steel strip

Dimensions (approx. dimensions)

Width W x length L : 20 x 60 mm

Connection thread : M 6

Drill hole-Ø : 10 mm

Dowel length : 28 mm

Wall distance : 11 mm

for steel strip width W x material thickness t : ≤ 40 x 6 mm

Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461

Material screws : steel, galvanised acc. to DIN EN ISO 4042, blue passivated

NIEDAX Model No. : 253 D

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098