



Strip Steel Distance Clamp

with connecting thread

251 G

EAN Code: 4013339152407
Smallest packaging unit: 50 pcs.

the photorealistic images are to be considered as reference images

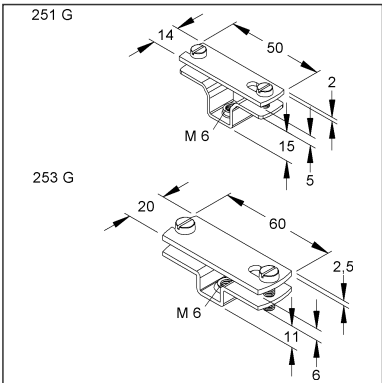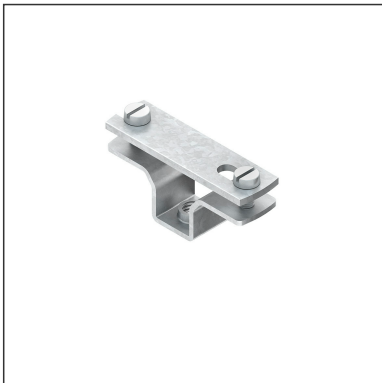

Article Description

Strip steel distance clamp, with thread M6, 50x14x5 mm, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N14
quantity unit	pcs.

Weight

Weight per quantity unit	27 g / pcs.
Weight in kg per 100	2,66 kg / 100pcs.

Physical Article Dimensions

Height	24.60 mm
Width	50.00 mm
Depth/length	14.00 mm

Technical Datasheet

Earthing and Equipotential bonding rail

251 G

the photorealistic images are to be considered as reference images

Packing Dimension

50 pieces = 1		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	138.00 mm	Width	128.00 mm	Height	71.00 mm
Gross weight	1,37 kg	Volume	0,001 m³		
Min. quantity	50.00 pcs.	Max. Quantity	50.00 pcs.		

500 pieces = 1 covering box					
Lenght	375 mm	Width	282 mm	Height	133.00 mm
Gross weight	14 kg	Volume	0,014 m³		
Min. Quantity	500.00 pcs.	Max. Quantity	500.00 pcs.		

8000 pieces = 1					
Lenght	750 mm	Width	750 mm	Height	730 mm
Gross weight	263 kg	Volume	0,411 m³		
Min. Quantity	8.000.00 pcs.	Max. Quantity	8.000.00 pcs.		

Tender Text

Strip iron distance clamp, including slotted cylinder head screws acc. to DIN EN ISO 1207, with connecting thread for screwing on, for laying steel strip.
 Used for : steel strip
 Dimensions (approx. dimensions)
 Width W x length L : 14 x 50 mm
 Connection thread : M 6
 Wall distance : 15 mm
 for steel strip width B x material thickness t : ≤ 30 x 5 mm
 Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461
 Material screws : steel, galvanised acc. to DIN EN ISO 4042, blue passivated
 NIEDAX Model No. : 251 G
 EP Material_____ EP Wage_____
 Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098