



Strip Steel Distance Clamp

with cup wheel, 10 mm high

213

EAN Code: 4013339151806
Smallest packaging unit: 50 pcs.

the photorealistic images are to be considered as reference images

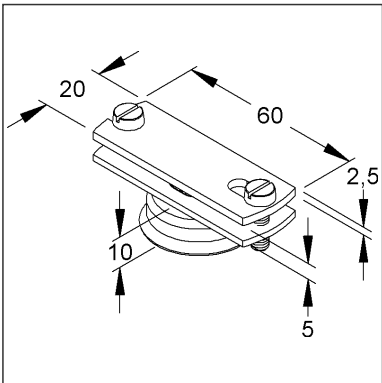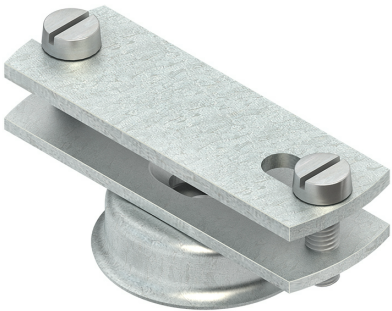

Article Description

Strip steel distance clamp,, with cup wheel, 10 mm high, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N14
quantity unit	pcs.

Weight

Weight per quantity unit	56 g / pcs.
Weight in kg per 100	5,52 kg / 100pcs.

Physical Article Dimensions

Height	22.80 mm
Width	60.00 mm
Depth/length	32.00 mm

Technical Datasheet

Earthing and Equipotential bonding rail

213

the photorealistic images are to be considered as reference images

Packing Dimension

50 pieces = 1 carton		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	205 mm	Width	120.00 mm	Height	80.00 mm
Gross weight	2,9 kg	Volume	0,002 m³		
Min. quantity	50.00 pcs.	Max. Quantity	50.00 pcs.		

5100 pieces = 1					
Lenght	750 mm	Width	750 mm	Height	730 mm
Gross weight	336 kg	Volume	0,411 m³		
Min. Quantity	5.100.00 pcs.	Max. Quantity	5.100.00 pcs.		

Tender Text

Strip steel distance clamp with cup washer, including cylinder head screws with slot acc. to DIN EN ISO 1207, with slotted fastening hole for screwing on.
 Used for : steel strip
 Dimensions (approx. dimensions)
 Width W x length L : 20 x 60 mm
 Fastening hole : 5.5 x 9 mm
 Drill hole-Ø : 10 mm
 Dowel length : 50 mm
 Wall distance : 10 mm
 for steel strip width W x material thickness t : ≤ 40 x 6 mm
 Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461
 Material screws : steel, galvanised acc. to DIN EN ISO 4042, blue passivated
 NIEDAX Model No. : 213
 EP Material_____ EP Wage_____
 Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tarif number	73269098