

Conduit- and Cable Distance Clamp



with female connection thread M6

855 G F

EAN Code: 4013339923380

Smallest packaging unit: 20 pcs.

the photorealistic images are to be considered as reference images

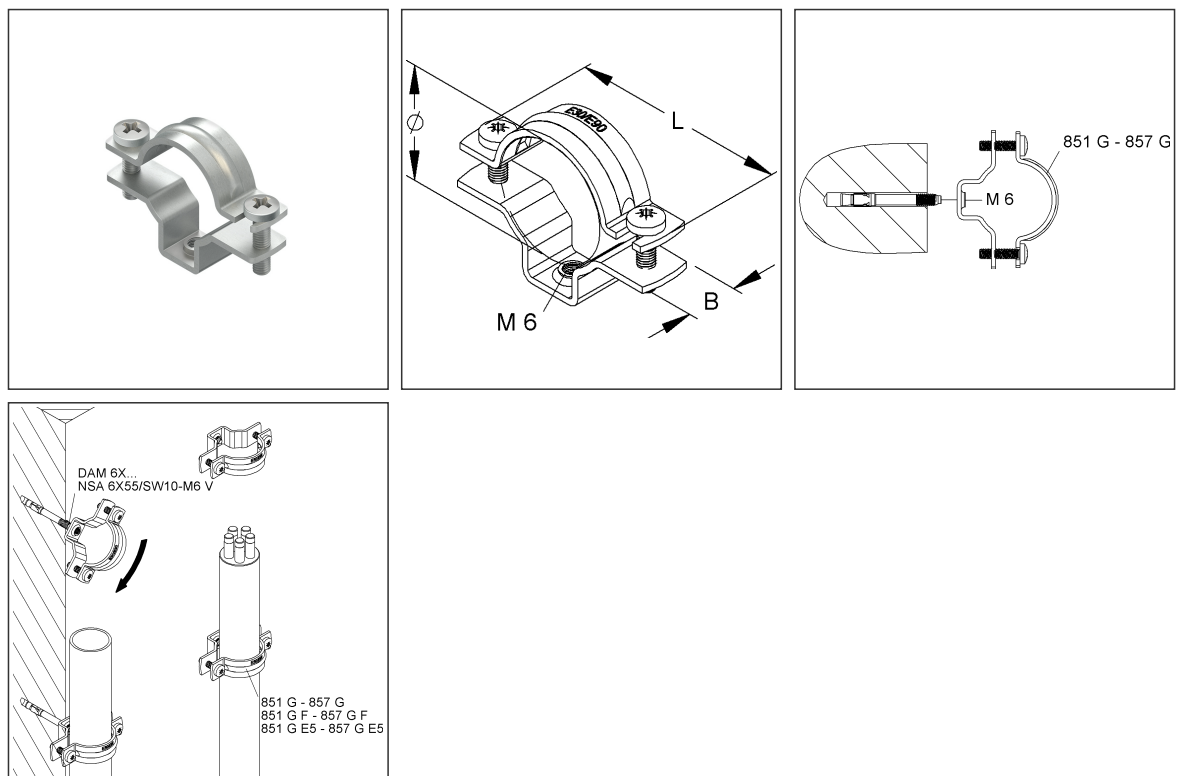

Article Description

Conduit- c. distance clamp, pipe-Ø40 mm, cab. clamping range -Ø38-47 mm, steel, hot dip galvanised DIN EN ISO 1461, with thread M6

Technical Datasheet

Conduit and cable distance clamps

855 G F

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N06
quantity unit	pcs.

Weight

Weight per quantity unit	64 g / pcs.
Weight in kg per 100	6,32 kg / 100pcs.

Physical Article Dimensions

Height	54.50 mm
Width	79.70 mm
Depth/length	16.00 mm

Packing Dimension

20 pieces = 1		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	192.00 mm	Width	138.00 mm	Height	71.00 mm
Gross weight	1,35 kg	Volume	0,002 m³		
Min. quantity	20.00 pcs.	Max. Quantity	20.00 pcs.		

200 pieces = 1 covering box					
Lenght	370 mm	Width	282 mm	Height	196.00 mm
Gross weight	14 kg	Volume	0,020 m³		
Min. Quantity	200.00 pcs.	Max. Quantity	200.00 pcs.		

6400 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	457 kg	Volume	0,960 m³		
Min. Quantity	6.400.00 pcs.	Max. Quantity	6.400.00 pcs.		

Tender Text

Conduit- and cable distance clamp, with M 6 internal thread, for screwing onto screw anchors up to 8 mm thread length, when installing on push-through anchors DAM 6X... or screw anchor NSA 6X55/SW10-M6, care must be taken to ensure that the connection thread of the push-through anchor does not protrude into the clamping area of the cable.

Please observe additional regulations for use in functional maintenance!

Used for: cables and electrical conduits according to DIN EN 61386-21

Dimensions (approx. dimensions)

Width W x length L : 16 x 79,7 mm

Internal connection thread : M 6

for cable clamping range-Ø : 38 - 47 mm

for pipe Ø : 40 mm

Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461

Material of screws : stainless steel, Material No. 1.4301, AISI 304

Niedax Model No. : 855 G F

EP Material_____ EP Wage_____

Unit price/piece

Technical Datasheet

Conduit and cable distance clamps

855 G F

the photorealistic images are to be considered as reference images

Safety & Environment	
REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable
Origin & International Trade	
Country of origin	DE
Customs tariff number	73269098